

July 2010

## Design and Simulation of Rotary Field Ferrite Phase Shifter using Ansoft HFSS

Parul Dawar

*Department Of Electronics and Communications, Guru Tegh Bahadur Institute of Technology, Rajouri Garden, new Delhi-110064, parul.dawar@gmail.com*

Follow this and additional works at: <https://www.interscience.in/ijcct>

---

### Recommended Citation

Dawar, Parul (2010) "Design and Simulation of Rotary Field Ferrite Phase Shifter using Ansoft HFSS," *International Journal of Computer and Communication Technology*. Vol. 1 : Iss. 3 , Article 2.  
Available at: <https://www.interscience.in/ijcct/vol1/iss3/2>

This Article is brought to you for free and open access by Interscience Research Network. It has been accepted for inclusion in International Journal of Computer and Communication Technology by an authorized editor of Interscience Research Network. For more information, please contact [sritampatnaik@gmail.com](mailto:sritampatnaik@gmail.com).

# Design and Simulation of Rotary Field Ferrite Phase Shifter using Ansoft HFSS

Parul Dawar

Department Of Electronics and Communications, Guru Tegh Bahadur Institute of Technology,  
Rajouri Garden, new Delhi-110064  
paru.dawar@gmail.com<sup>1</sup>

**Abstract**—HFSS is a high-performance full-wave electromagnetic (EM) field simulator for arbitrary 3D volumetric passive device modeling. It employs the Finite Element Method (FEM), adaptive meshing, and brilliant graphics. This paper reports the measured phase shift characteristics of C-band phase shifters constructed from lithium ferrites. This is done by first magnetizing the ferrite rod in perpendicular (to direction of propagation) direction and then in longitudinal (parallel to direction of propagation). Thereby, giving a phase shift of 90 degrees. It has been proved that by giving a phase shift of 90 degrees to the magnetic field, we will get the phase shift of twice the rotation i.e. 180 degrees.

**Keywords**— Microwave, HFSS, Ferrite phase shifters, Ferrite waveguides, Magnetic microwave devices

A central field rotatable half wave plate is coupled at each end to fixed quarter wave plates that in turn couple to transducers to waveguide or other transmission structure.

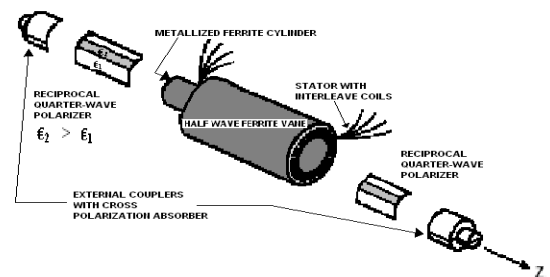


Fig 3: Sketch of internal parts of a typical ferrite rotary-field phase shifter, showing drive stator with ferrite rod, dielectric quarter wave plates, and transducers prior to metallization

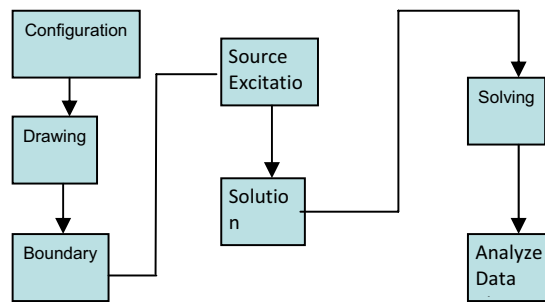


Fig 1: Procedure to simulate objects in HFSS.

## I. DESIGNING

### A. Construction

The basic functional diagram of the rotary field phase shifter is sketched in Fig 2




Fig 2: Functional block diagram of ferrite rotary-field phase shifter

Fig 3 sketches a practical realization consisting of a central ferrite cylinder which completely fills a circular waveguide and which is coupled at each end to ceramic dielectric assemblies that in homogeneously fill the waveguide. These dielectric quarter wave plate sections convert linear polarization incident at either end in to circularly polarized TE<sub>11</sub> mode waves at the interface with the ferrite section. Beyond the dielectric quarter-wave plates are transducers coupling the circular waveguide to ordinary rectangular guide, and at the same time absorbing any energy cross-polarized to the propagating wave orientation. The ferrite is biased with a transverse four pole magnetic field to a level that creates a birefringence of 180° differential phase (i.e. a half-wave plate).

### B. Principle of operation

It is a magnetically variable version of the rotary vane phase shifter. Resistive films are incorporated in the matching section to absorb any unwanted cross-

polarized modes. Outside the metallic waveguide wall, a ferrite frame known as multi-pole yoke is placed which physically resembles a motor stator, containing sine and cosine orthogonal windings. These windings produce a transverse four-pole magnetic field. This transverse field with quadrupole characteristics has a much stronger interaction with the ferrite than that of bipolar field case. The ferrite rod is biased with this transverse four-pole magnetic field to a level that creates a birefringence of 180° differential phase (i.e. half wave plate).

C. Sample preparation

The properties of ferrite rod material are in table 1 below.

TABLE 1: ROD MATERIAL CHARACTERISTICS

Material	Li-Ti ferrite
Saturation Magnetization 4πMs	1250 Gauss
Remanence R	0.9
Curie temperature, Tc	≈ 310oC
Dielectric constant ε'	17.5
Resonance linewidth ΔH	≈300 Oe
Dielectric loss tangent tanδ	<=0.0005

There lies a strong possibility of coupling occurring between the dominant TE<sub>11</sub> mode and any mode with quadrantal symmetry because of distortion produced by the transverse bias field in rod medium. Therefore, the rod diameter is chosen such that the highest operating frequency is below the cut-off frequency of TE<sub>21</sub> mode. The cut-off frequency of TE<sub>21</sub> mode is taken as 5.9 GHz which is the highest operating frequency. For TE<sub>21</sub> mode cut-off

$$f_c = 3.054/\pi d(\mu\epsilon)^{1/2} \tag{1}$$

The diameter is chosen as 12.2 mm which is lower than the maximum diameter obtained to keep a safe margin for onset of higher order modes. The ferrite rod is to be metallized using electroplating, so that it acts as a circular waveguide. The skin depth of silver at 5.7 GHz is computed to be 0.85μm. Hence the coating thickness of order of 3μm which lies between 3-4 times of skin depth.

D. Design on HFSS

D.1 The ferrite rod specifying cut-off frequency as 5.9 GHz ,as in Fig 4(a), was designed and waveports

assigned on either ends of rod as in fig 4(b) and fig 4(c)

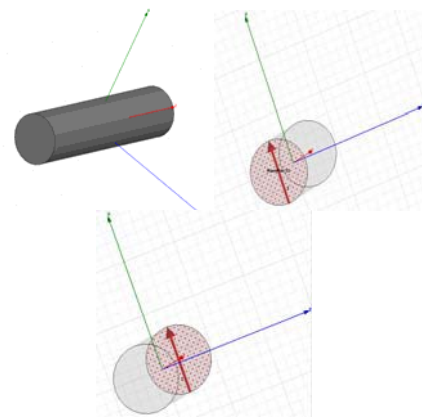


Fig 4(a) Fig 4(b) Fig 4(c)

D.2. Analysis result for sweep frequency from 5.4 GHz to 5.9 GHz of S<sub>11</sub> and S<sub>22</sub> is in Fig 4(d)and S<sub>12</sub> and S<sub>21</sub> is in Fig 4(e)

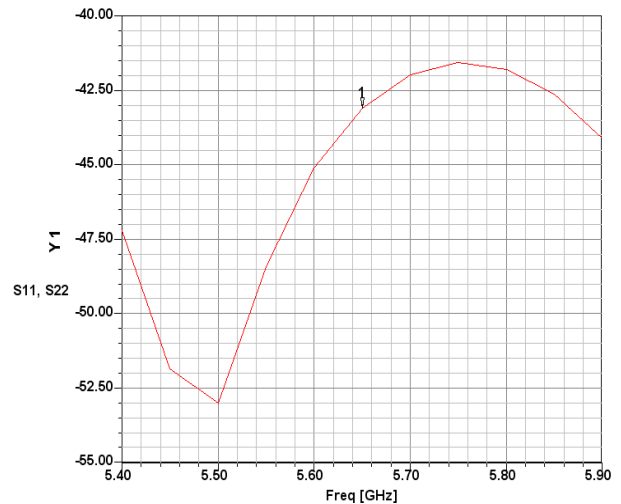


Fig 4(d) Polar plot of S<sub>11</sub> and S<sub>22</sub>

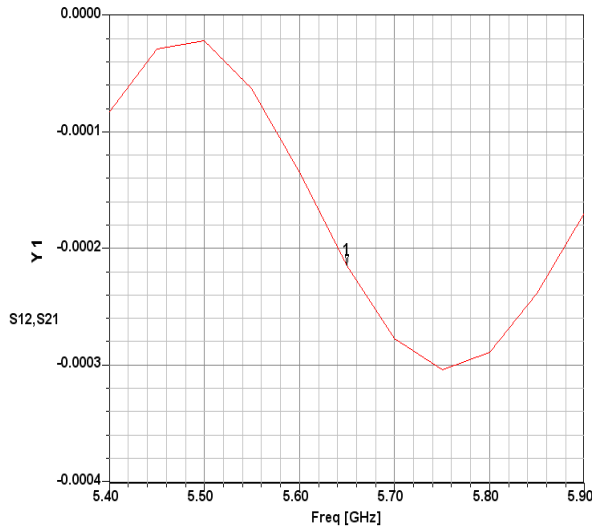


Fig 4(e) Polar plot of  $S_{12}$  and  $S_{21}$

D.3 Polarizer was constructed as in Fig 5(a) and assigned perpendicular excitation waveports as in Fig 5(b) and Fig 5(c).

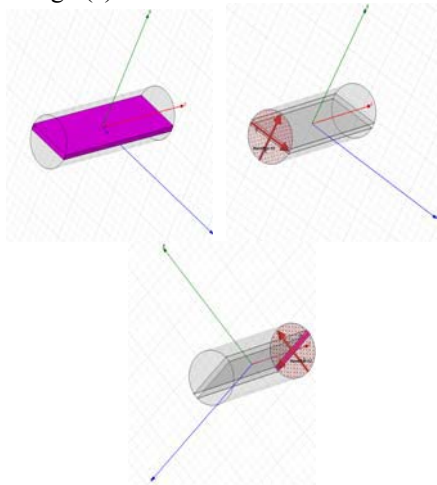


Fig 5(a)

Fig 5(b)

Fig 5(c)

D.4 Analysis results of Fig 5(a) structure for  $S_{11}, S_{22}, S_{12}$  and  $S_{21}$  at center frequency of 5.65 GHz are shown in Fig 5(d) and port impedances in Fig 5(e)

Freq	S:\WavePort1.1	S:\WavePort1.2	S:\WavePort2.1	S:\WavePort2.2
5.65 (GHz)	WavePort1.1 (0.0068754, 80.1)	(0.00084355, 68.3)	(0.99997, -19)	(0.0018468, -16)
	WavePort1.2 (0.00084355, 68.3)	(0.044326, 168)	(0.0018805, -116)	(0.99901, 67.3)
	WavePort2.1 (0.99997, -19)	(0.0018805, -116)	(0.0068757, 61.9)	(0.00076297, 161)
	WavePort2.2 (0.0018468, -16)	(0.99901, 67.3)	(0.00076297, 161)	(0.044329, 147)

Fig 5(d) Analysis result of  $S_{11}, S_{22}, S_{12}$  and  $S_{21}$

Freq	Port Zo
5.65 (GHz)	WavePort1:1 [ 117.84, 2.67e-005]
	WavePort1:2 [ 131.74, 0]
	WavePort2:1 [ 118.6, 0]
	WavePort2:2 [ 132.9, 0]

Fig 5(e) port impedances

D.5 Polarizer was added to the ferrite rod as shown in Fig 6(a) and uniform magnetic bias of 240000A/m (transverse) was assigned as in Fig 6(b) and waveports were assigned as in Fig 6(c) and Fig 6(d)

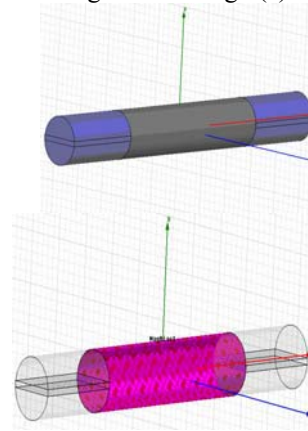


Fig 6(a)

Fig 6(b)

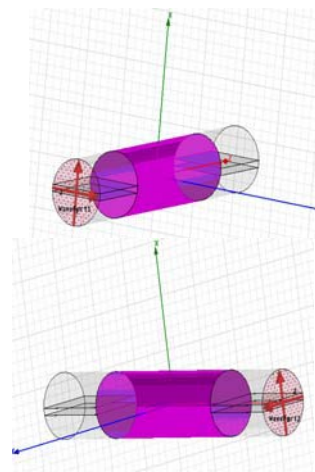


FIG 6(C)

FIG 6(D)

D.6 Analysis results for Fig 6(a) structure for  $S_{11}, S_{22}, S_{12}$  and  $S_{21}$  is shown in Fig 6(e) and Fig 6(f) over frequency sweep from 5.4 GHz to 5.9 GHz

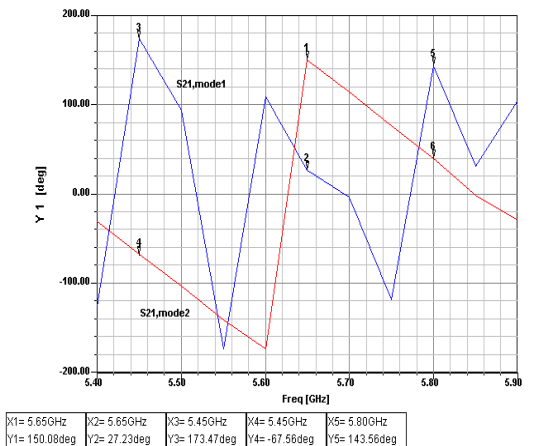


Fig 6(e) Analysis results for Fig 6(a) structure for S<sub>21</sub>

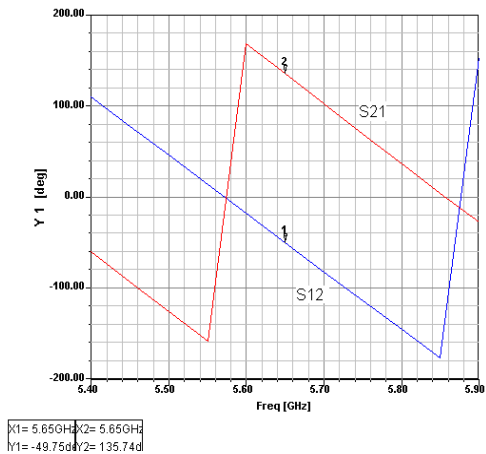


Fig 6(g) Analysis results for Fig 6(a) structure for S<sub>12</sub> and S<sub>21</sub> with magnetic bias

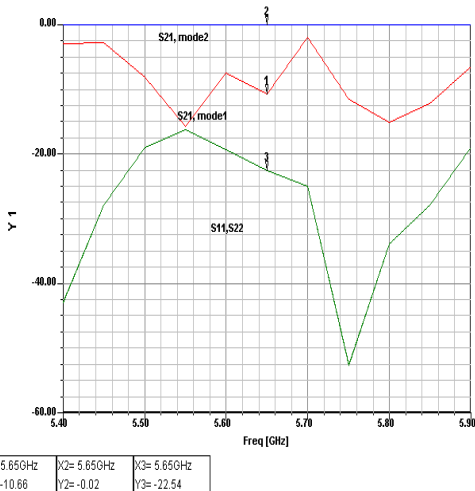


Fig 6(f) Analysis results for Fig 6(a) structure for S<sub>11</sub>,S<sub>22</sub>,S<sub>12</sub> and S<sub>21</sub>

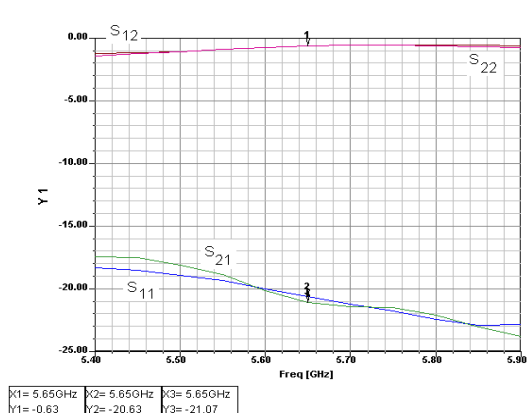


Fig 6(h) Analysis results for S<sub>11</sub>,S<sub>22</sub>,S<sub>12</sub> and S<sub>21</sub> for Fig 6(a) structure with magnetic bias

D.7 Similarly, uniform magnetic bias of 240000A/m (longitudinal) and waveports were assigned to Fig 6(a) structure .Analysis results for S<sub>11</sub>,S<sub>22</sub>,S<sub>12</sub> and S<sub>21</sub> is shown in Fig 6(g) and Fig 6(h) over frequency sweep from 5.4 GHz to 5.9 GHz and Fig 6(i) shows the phase shift which is -185.49 degrees.

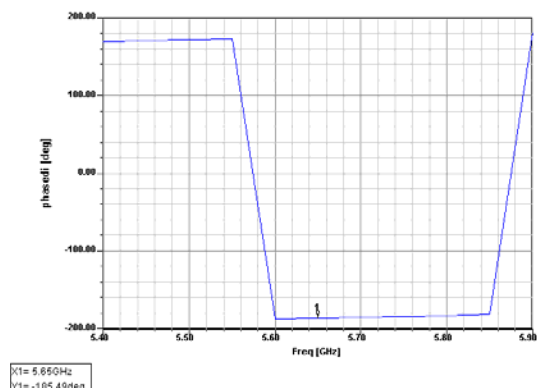


Fig 6(i) Phase shift -185.49 degrees for Fig 6(a) structure

D.8 Brass housing was added on either sides as in Fig 7(a), matching section was subtracted from it as in Fig 7(b).

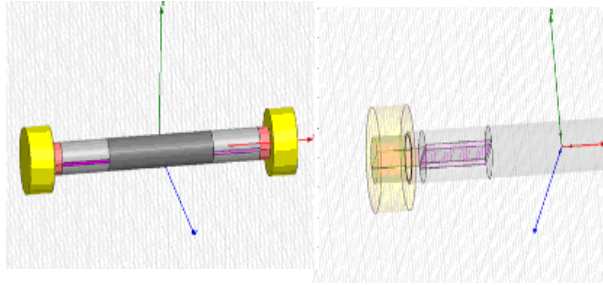


Fig 7(a)

Fig 7(b)

D.9 Fig 7(c) shows analysis results for  $S_{11}, S_{22}$  and Fig 7(d) shows analysis results  $S_{12}$  and  $S_{21}$  after assigning waveports to Fig 7(a) structure.

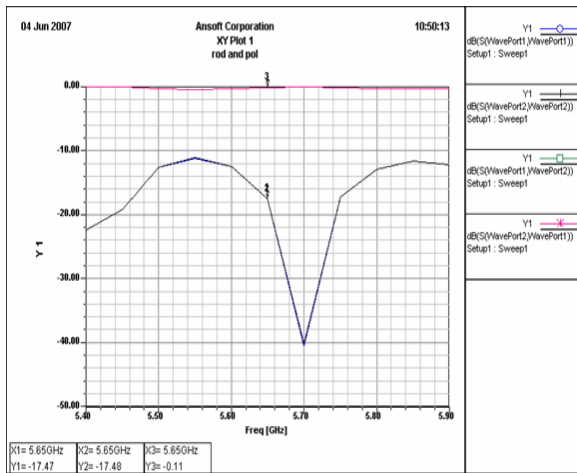


Fig 7(c) Analysis results for  $S_{11}, S_{22}$  for 7(a) structure

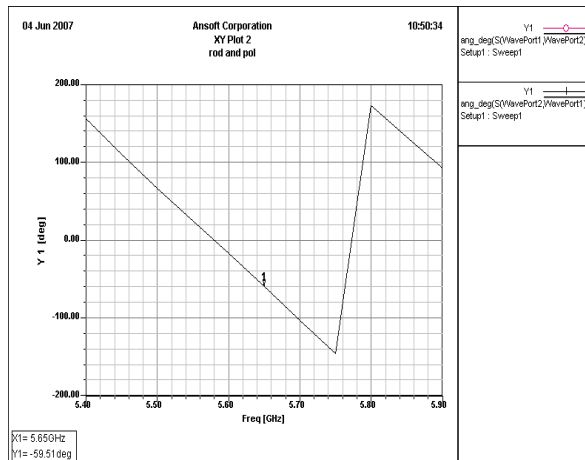


Fig 7(d) Analysis results for  $S_{12}$  and  $S_{21}$  for 7(a) structure

## II. RESULT

Structure in Fig 8(a) is similar to the one drawn for the matching section analysis with rotated polarizers by 45 degrees, so as to convert a linearly polarized wave to circularly polarized wave at the output of the input end polarizer and vice-versa is true for output end polarizer. Thereby, completing the design of Ferrite rotary vane phase shifter.

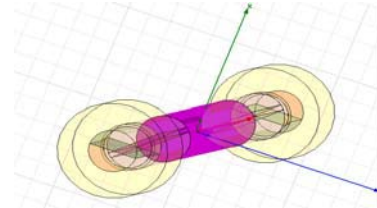


Fig 8(a) Rotary vane ferrite phase shifter

By magnetising ferrite rod in transverse direction we get plots as in Fig 8(b) and 8(c), thereby giving phase shift (transverse magnetize) as 118.26 degrees

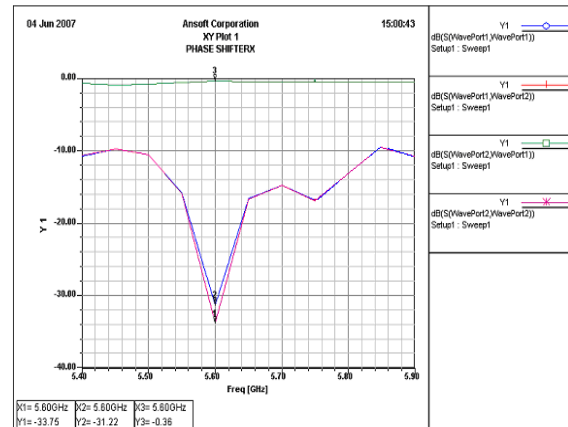


Fig 8(b) Phase plot of  $S_{11}, S_{22}, S_{12}$  and  $S_{21}$

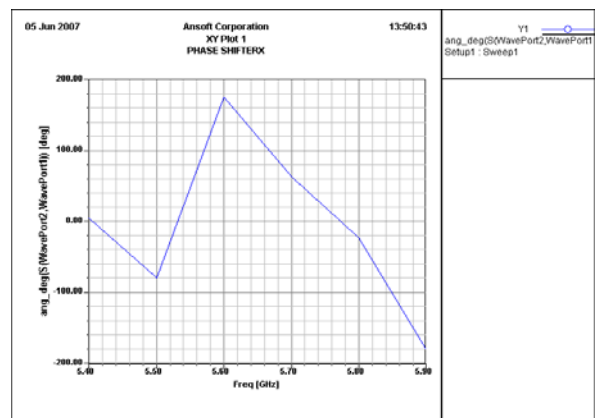


Fig 8(c) Phase plot of  $S_{21}$

Next by magnetising ferrite rod in longitudinal direction we get plots as in Fig 9(a) and 9(b), thereby giving phase shift (longitudinally magnetize) as -54.6 degrees.

- [4] Gao Jianping, Zhang Zhixian. Electric wave transmission, Xi'an: Northwestern technical university publication, 2002.
- [5] Xu Longxiang. The iterative computation new method of optimum Pyramid horn antenna. control guidance and fuze ,1996,1:44-46

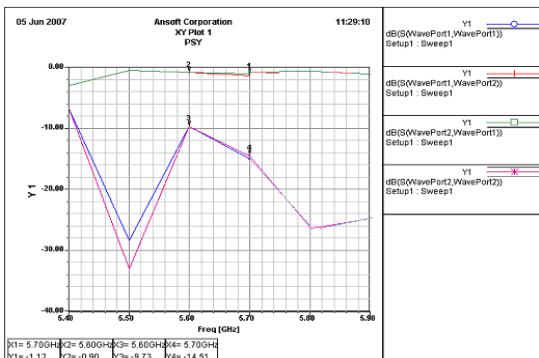


Fig 9(a) Phase plot of S<sub>11</sub>, S<sub>22</sub>, S<sub>12</sub> and S<sub>21</sub>

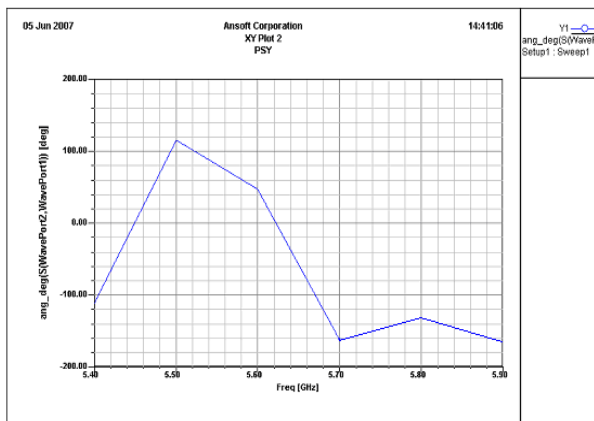


Fig 9(b) Phase plot of S<sub>21</sub>

THUS, TOTAL PHASE SHIFT = 118.26- (-54.6)  
= 172.86 ° (≈ 180°)

It has been proved that by giving a phase shift of 90 degrees to the magnetic field, we will get the phase shift of twice the rotation i.e. 180 degrees.

REFERENCES

- [1] K.Kupfer, A.Kraszewski, and R.knochel. RF and microwave sensing of moist materials, food, and other dielectrics.Sensors Update, Jan.2000, Vol.7.
- [2] S.Trabelsi and S.O.Nelson, and P.G.Bartley Jr. Coaxialdielectric sensor for cereal grains. IEEE Instrum.Meas.Technolgy. May 20-22,2003.
- [3] Samir Trabelsi, Andrzej W Kraszewski and Stuart O Nelson. Nondestructive microwave characterization for determining the bulk density and moisture content of shelled corn.Meas.Sci.Technol.1998.