

April 2014

DESIGN OF SUBSTRATE INTEGRATED WAVEGUIDE H- PLANE HORN ANTENNA ON A PTFE SUBSTRATE

D. U. NAIR

Electronics Department, Pillai's Institute of Information Technology Navi Mumbai, India,
deeptiu.nair@gmail.com

CHETAN ZELE

R&D Dept. Vedang Radio Technology Mumbai, India, chetan.zele@gmail.com

Follow this and additional works at: <https://www.interscience.in/ijeee>



Part of the [Power and Energy Commons](#)

Recommended Citation

NAIR, D. U. and ZELE, CHETAN (2014) "DESIGN OF SUBSTRATE INTEGRATED WAVEGUIDE H- PLANE HORN ANTENNA ON A PTFE SUBSTRATE," *International Journal of Electronics and Electrical Engineering*: Vol. 2 : Iss. 4 , Article 8.

Available at: <https://www.interscience.in/ijeee/vol2/iss4/8>

This Article is brought to you for free and open access by Interscience Research Network. It has been accepted for inclusion in International Journal of Electronics and Electrical Engineering by an authorized editor of Interscience Research Network. For more information, please contact sritampatnaik@gmail.com.

DESIGN OF SUBSTRATE INTEGRATED WAVEGUIDE H- PLANE HORN ANTENNA ON A PTFE SUBSTRATE

D. U. NAIR¹ & CHETAN ZELE²

¹Electronics Department Pillai's Institute of Information Technology Navi Mumbai, India

²R&D Dept. Vedang Radio Technology Mumbai, India

Email:deeptiu.nair@gmail.com, chetan.zele@gmail.com

Abstract — Rectangular dielectric loaded substrate integrated waveguide (SIW) H-plane horn antenna, operating at 26 GHz has been proposed in this paper. For the simulations, a substrate of thickness 3.2mm and a dielectric material of Poly Tetra Fluoro Ethylene (PTFE) has been used. The size of antenna was reduced and a dielectric slab was loaded in front of the horn. This resulted in the increase of gain and also narrow beamwidths in the E- plane and H- plane. A comparison between two horn antennas, one without dielectric loading and one with dielectric loading has been presented in this paper.

Keywords— *Substrate Integrated Waveguide, Dielectric loading, H-plane sectoral horn, HFSS.*

I. INTRODUCTION


Substrate integrated waveguide (SIW) is a type of transmission line which allows a nonplanar structure like an antenna to be transformed into a planar form by integrating it on a single substrate. This results in a compact structure. The substrate-integrated waveguide (SIW) technique has been investigated and developed to construct the planar rectangular waveguide [1]–[10]. It implements a waveguide on a piece of printed circuit board by emulating the side walls of the waveguide using two rows of metal posts. It inherits the merits both from the microstrip for compact size and easy integration, and from the waveguide for low radiation loss, and thus allows design of efficient microwave circuits and antennas at a low cost.

The design and fabrication of dielectric loaded SIW horn antennas on a substrate having a dielectric constant of 4.8 and thickness of 2.5 was carried out in [11]. In this paper, a substrate with dielectric constant of 2.45, thickness of 3.2 mm and loss tangent of 0.002 is used in all the simulations. All the simulations are carried out using Ansoft HFSS. The two structures that have been simulated are the SIW H- plane horn antenna without dielectric loading and short length rectangular dielectric loaded SIW H- plane horn antenna. The dielectric slab loaded in front of the short length horn results in a narrow E- beamwidth. By choosing proper length of the dielectric slab, the beamwidth in the H- plane can also be narrowed and consequently high gain can be obtained.

II. SIW H-PLANE SECTORAL HORN ANTENNA

The HFSS model of substrate integrated waveguide h- plane horn antenna without dielectric loading is shown in Figure.1.

Based on the design rules for SIW given in [12], the radius of the vias is chosen to be 0.5mm and the centre to centre distance is 1mm.

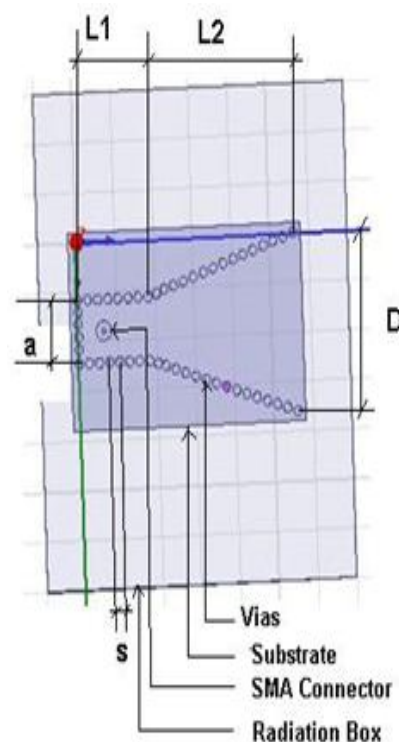

L1= 9mm, L2= 19mm, D= 18mm, a= 6.4mm,
diameter of vias= 1mm, distance between
two vias= 1.3mm

Fig.1 SIW H- plane horn antenna without dielectric loading

Figures.2, 3, 4 and 5 show the simulated results for S11, gain and beamwidths respectively.

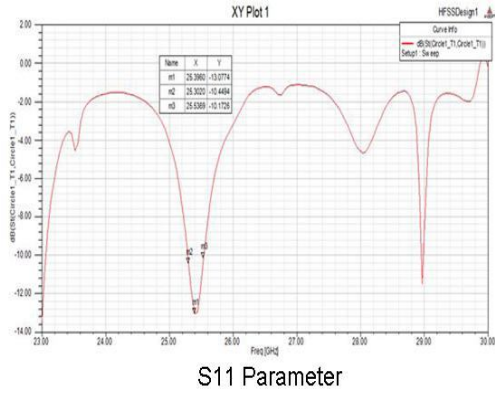


Fig.2. SIW horn antenna without dielectric loading- S11 plot

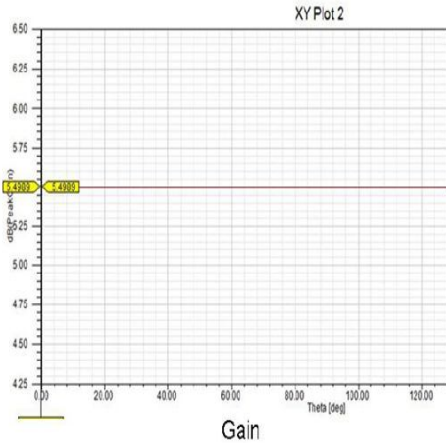


Fig 3 SIW horn antenna without dielectric loading- Gain plot


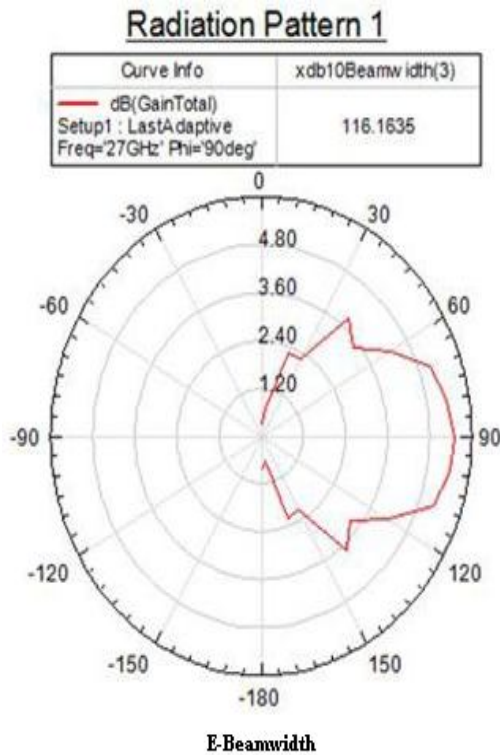


Fig 4. SIW horn antenna without dielectric loading- E-beamwidth plot

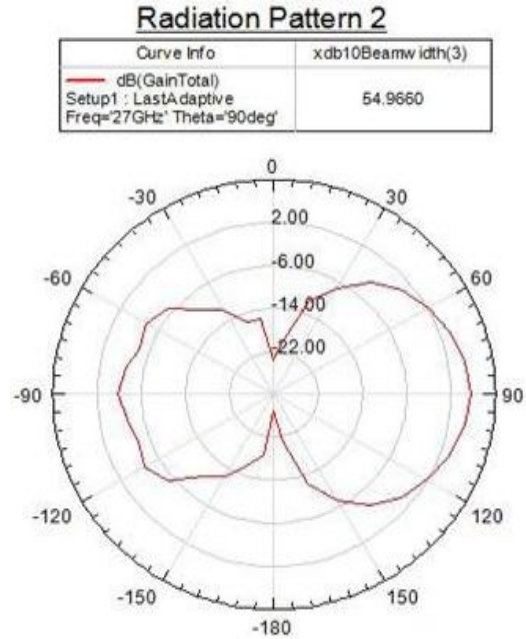

H-Beamwidth
Fig 5 SIW horn antenna without dielectric loading- H-beamwidth plot

III. DIELECTRIC LOADED SIW H-PLANE SECTORAL HORN ANTENNA

The structure can be made even more compact by reducing the size of the horn. This can be achieved by reducing the length of horn and placing a dielectric slab of proper length in front of the aperture. Such a structure is shown in Fig.6. The length (L2) of the horn has been reduced to 12.45mm and a dielectric slab of length 9.5mm has been placed in front of the horn. The gain obtained is maximum for this length of the dielectric slab.

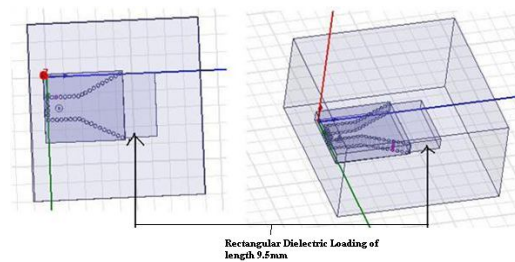


Fig 6 Short length SIW H-plane horn antenna with dielectric loading

Figures.7, 8, 9 and 10 shows the simulated results for this structure.

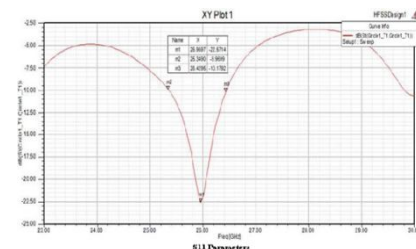


Fig 7 SIW horn antenna with dielectric loading- S11 plot

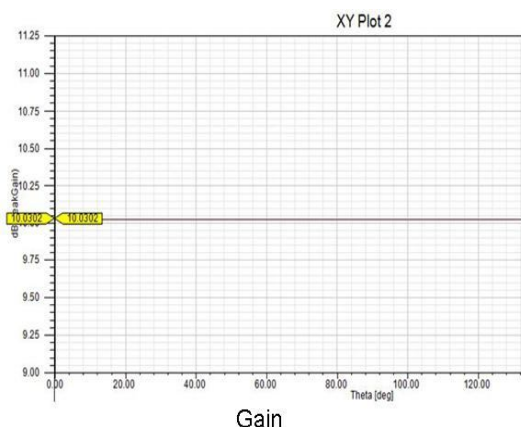


Fig 8 SIW horn antenna with dielectric loading- Gain plot

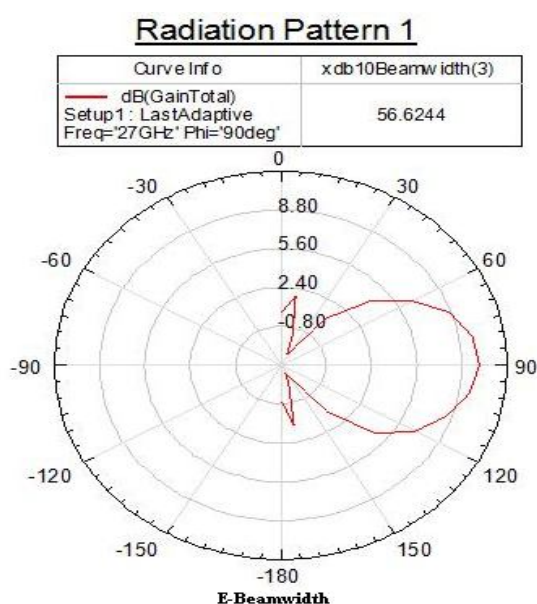


Fig 9 SIW horn antenna with dielectric loading- E-beamwidth plot

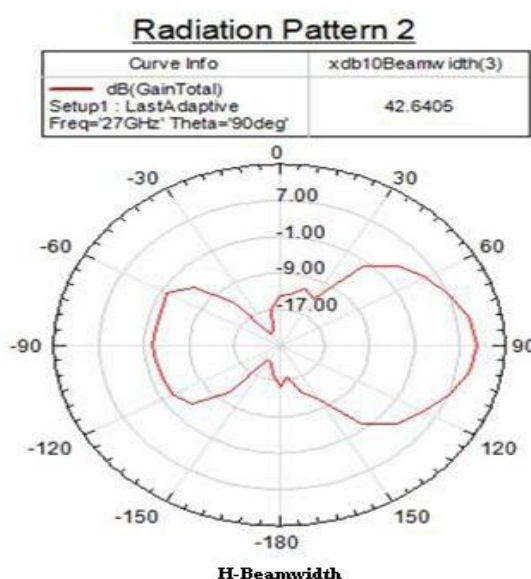


Fig 10. SIW horn antenna with dielectric loading- H-beamwidth plot

A comparison of the simulated results for without dielectric loading and with dielectric loading is shown in Table 1. It can be observed from Table 1 that, with dielectric loading, the gain is almost double than that of without loading. The frequency at which best results are obtained has been considered.

TABLE 1. COMPARISON BETWEEN WITHOUT DIELECTRIC LOADING AND WITH DIELECTRIC LOADING

SIW H-plane horn antenna	Return Loss (dB)	Gain (dB)	E-Beamwidth (degree)	H-Beamwidth (degree)
Without dielectric loading	-13 @ 25.39 GHz	5.49	116.16	54.96
Short length with dielectric loading	-22.5 @ 26 GHz	10.03	56.62	42.64

CONCLUSION

Dielectric loaded Substrate Integrated Waveguide (SIW) H-plane horn antenna showing best results at 26 GHz has been presented in this paper. A comparison between the simulated results of horn antenna without dielectric loading and with dielectric loading shows that by placing a dielectric slab of proper length in front of the aperture of horn results in the reduction of beamwidths in the E-plane and H-plane, as a result of which the gain of the antenna increases. Such antennas are very much suited for automotive radar applications.

ACKNOWLEDGMENT

This work was supported by EMI/ EMC division, SAMEER(Society for Applied Microwave Electronics Engineering and Research), IIT Powai campus, Mumbai. The authors wish to express their gratitude to Smt. S. R. Ranade, H.O.D, EMI/ EMC division, SAMEER, for her helpful comments and discussions. The authors would also like to thank Shri S.S. Kakatkar and Shri G.S. Isola, senior scientists at SAMEER for their constant and timely support which helped in completing this work.

REFERENCES

- [1] D.Deslandes and K. Wu, "Integrated transition of coplanar to rectangular waveguides," in *IEEE MTT-S Int. Microwave Symp. Dig.*, Feb.2001, pp. 619-622.
- [2] Y. Cassivi *et al.*, "Dispersion characteristics of substrate integrated rectangular waveguide," *IEEE Microw. Wireless Compon. Lett.*, vol.12, no. 9, pp. 333-335, 2002.
- [3] C.-H. Tseng and T.-H. Chu, "Measurement of frequency-dependent equivalent width of substrate integrated waveguide," *IEEE Trans. Microw. Theory Tech.*, vol. 54, no. 4, pp. 1431-1437, 2006.
- [4] F. Xu and K. Wu, "Guided-wave and leakage characteristics of substrate integrated waveguide," *IEEE Trans. Microw. Theory Tech.*, vol. 53, no. 1, pp. 66-73, 2005.
- [5] D. Deslande and K. Wu, "Single-substrate integration technique of planar circuits and waveguide filters," *IEEE*

- Trans. Microw. Theory Tech.*, vol. 51, no. 2, pp. 593–596, 2003.
- [6] A. Zeid and H. Baudrand, “Electromagnetic scattering by metallic holes and its applications in microwave circuit design,” *IEEE Trans. Microw. Theory Tech.*, vol. 50, no. 4, pp. 1198–1206, 2002.
- [7] L. Yan *et al.*, “Simulation and experiment on SIW slot array antenna,” *IEEE Microw. Wireless Compon. Lett.*, vol. 14, no. 9, pp. 446–448, 2004.
- [8] D. Deslandes and K.Wu, “Integrated microstrip and rectangular waveguide in planar form,” *IEEE Microw. Wireless Compon. Lett.*, vol. 11, pp. 68–70, 2001
- [9] F. Xu, K.Wu, and W. Hong, “Domain-decomposition FDTD algorithm combined with numerical TL calibration technique and its application in parameter extraction of substrate integrated,” *IEEE Trans. Microw. Theory Tech.*, vol. 54, no. 1, pp. 329–338, 2006.
- [10] Z. L. Li and K. Wu, “An new approach to integrated horn antenna,” in *Proc. Int. Symp. on Antenna Technology and Applied Electromagnetics*, Jul. 2004, pp. 535–538.
- [11] Hao Wang, Da-Gang Fang , Bing Zhang , Wen-Quan Che, “Dielectric Loaded Substrate Integrated Waveguide (SIW) H-Plane Horn Antennas,” *IEEE Trans. Antenna and Propagation* vol. 58, no. 3, March 2010
- [12] Dominic Deslandes, and Ke Wu, “Accurate Modeling, Wave Mechanisms, and Design Considerations of a Substrate Integrated Waveguide,” *IEEE Trans. Microw.Theory Tech.*, vol. 54, no. 6, June 2006.

