

April 2011

## Reducing Throughput-delay Analysis of Conflict-free Scheduling in Multihop Adhoc Networks

N.Mallikharjuna Rao  
APGCCS, Rajampet, Mallikharjuna@gmail.com

D.J.Samatha Naidu  
APGCCS, Rajampet, samramana44@gmail.com

J.Mithun Kumar  
APGCCS, Rajampet., kumar\_aasc9396@yahoo.co.in

S. NoorJahan  
APGCCS, Rajampet, noor.deevani@gmail.com

Follow this and additional works at: <https://www.interscience.in/ijcns>



Part of the [Computer Engineering Commons](#), and the [Systems and Communications Commons](#)

---

### Recommended Citation

Rao, N.Mallikharjuna; Naidu, D.J.Samatha; Kumar, J.Mithun; and NoorJahan, S. (2011) "Reducing Throughput-delay Analysis of Conflict-free Scheduling in Multihop Adhoc Networks," *International Journal of Communication Networks and Security*. Vol. 1 : Iss. 1 , Article 8.

DOI: 10.47893/IJCNS.2011.1006

Available at: <https://www.interscience.in/ijcns/vol1/iss1/8>

This Article is brought to you for free and open access by the Interscience Journals at Interscience Research Network. It has been accepted for inclusion in International Journal of Communication Networks and Security by an authorized editor of Interscience Research Network. For more information, please contact [sritampatnaik@gmail.com](mailto:sritampatnaik@gmail.com).

---

# Reducing Throughput-delay Analysis of Conflict-free Scheduling in Multihop Adhoc Networks

N.Mallikharjuna Rao<sup>1</sup>, D.J.Samatha Naidu<sup>2</sup>, J.Mithun Kumar<sup>3</sup>, S.NoorJahan<sup>4</sup>

APGCCS, Rajampet.<sup>1,2,3,4</sup>

samramana44@gmail.com<sup>2</sup>, kumar\_aasc9396@yahoo.co.in<sup>3</sup>, noor.deevani@gmail.com<sup>4</sup>

**ABSTRACT-** An Adhoc networks is a self organized and distributed entity, consisting of  $n$  mobile stations (MSs) without the coordination of any centralized access point. Initialization is one of the fundamental tasks to set up an adhoc network, which involves assigning of each of the  $n$  MSs a distinct ID number from 1 to  $n$ , distributedly. In randomized initialization protocols are developed for single-hop adhoc networks under different conditions. This study investigates the performance of an analytical approximation for the throughput-delay characteristic of a multihop ad-hoc network employing conflict-free time division multiplex (TDM) scheduling with half-duplex transceivers. The approximation models traffic at each link as an independent M/D/1 queue and its performance is measured by comparing to simulation results for various topologies, traffic loads, and network sizes. Results indicate that the approximation is most appropriate for a tandem network but is also reasonable for other two-dimensional topologies. In the two-dimensional topologies, the approximation clearly improves at high traffic loads but does not exhibit distinguishable trends over the network sizes observed.

**Keywords:** Introduction, Network Delay Approximation, Simulation Method, Experimental Scenario, Results & Discussion.

## I. INTRODUCTION

Ad hoc networks are connection-less networking systems, a collection of interconnected networks without communication channels like fiber optic cables, copper wires, twisted pairs, etc., are not required to communicate. Collection of mobile stations transmits the information through the base stations without communication lines. Scheduling and routing protocols for multihop ad-hoc networks are constantly being proposed or modified, and results in this area of research rely on the chosen performance analysis method. In these complex networks, an exact analysis of throughput-delay characteristics is difficult and often limited to small networks with simple topologies [1]. Simulation studies are the commonly used alternative, but are often time consuming. Analytical approximations are an attractive option. This work investigates an approximation to the throughput-delay for a guaranteed access scheduling protocol. Guaranteed access is one type of scheduling method that allows for control over the packet

delay [3]. The ability to directly influence the delay through scheduling is critical to real-time applications and is a means for providing quality of service (QoS) guarantees in a multihop ad-hoc network.

In other work on multihop networks, approximations have been used for the throughput-delay for time division multiplex (TDM) scheduling. Upon introducing the channel access protocol Spatial - Time Division Multiple Access (S-TDMA), Nelson and Kleinrock used a fluid approximation to evaluate the mean system delay of messages. They approximated the random length of the backlog on a link by its expected value and evaluated its growth through a regenerative process consisting of input, service, and idle modes. The delay on that link can be found by dividing the average backlog length by the average arrivals to the link. The average delay can be found by summing link delays weighted by their relative traffic loads. The results of the fluid approximation were shown to match closely with simulation results, but the mean delay varied widely according to assumptions about the ordering and size of input, service, and idle intervals. This type of analytical analysis based on regenerative processes is often employed for complicated protocols [3], but for TDM scheduling, a more simple queuing analysis may suffice. This was the approach taken by Ju and Li in their work proposing that TDMA scheduling be based on Latin Squares. They evaluated the average packet delay for this protocol using an M/M/1 queuing model with bulk arrivals. Though transmission times for TDM scheduling correspond to discrete length slots, the inter-departure times were assumed to be stochastic to account for the fact that collisions may occur on the channel for the scheduling technique being evaluated. Simulation results attested to the accuracy of this analytical method. A similar approximation with deterministic service times can be used for conflict-free schedules.

This work considers an approximation for the expected end-to-end packet delay based on the assumption that the traffic at each link acts as an independent M/D/1 queue [6]. A queuing model for traffic is used for wired networks [7] and is applicable to a wireless network by accounting for operation of the hardware in half-duplex mode. Research in ad-hoc networks makes use of

this traffic model [2], but this study is the first known to the authors to focus on the performance of the M/D/1 approximation. The approximation can be applied for a known fixed routing and a conflict-free schedule defined by a repeating frame of equally-sized time slots. This represents the state of a mobile network at the time of route and schedule updates, and the performance may change as nodes move.

In the following section, the delay approximation is derived and necessary assumptions are discussed. A network simulator used for performance comparisons is then described in detail. The scenarios used in evaluating the approximation are presented, followed by a discussion of the suitability of the approximation for various traffic loads, topologies, and network sizes.

**II. NETWORK DELAY APPROXIMATION**

The *end-to-end packet delay* is defined as the time between the arrival of a packet at the buffer of the *source* node and its successful reception at the *destination* node. The end-to-end packet delay allows for evaluation of the quality of service (QoS) under low, moderate, and high traffic. For this discussion the following assumptions are needed.

- The external traffic source attached to each node generates Poisson distributed packet arrivals with average traffic load  $\lambda/N$  (packets/slot) where  $N$  is the number of nodes in the network, and  $\lambda$  is **the total external traffic load**.
- Packet destination is equally likely among nodes. The initial source ( $S$ ) and final destination ( $D$ ) of a packet is denoted by an  $(S, D)$  pair. In a multihop ad-hoc network a routing algorithm must be used to select a set of intermediate links (path) between  $(S, D)$  pairs to route the packet. Therefore, the average traffic load passing through a link  $(i, j)$ ,  $\lambda_{ij}$ , is the result of external and internal traffic [2].

$$\lambda_{ij} = \sum_{\substack{\forall (S,D) \text{ routed} \\ \text{through link } (i,j)}} \frac{\lambda}{N(N-1)} = \frac{\lambda}{N(N-1)} T_{ij} \quad (1)$$

$T_{ij}$  are the elements of the *relative traffic load* matrix  $T$  given by the cardinality of the set of  $(S, D)$  pairs routed through link  $(i,j)$ . In other words,  $T_{ij}$  represents the number of route paths that traverse link  $(i, j)$ . The assumption of Poisson arrivals to a node does not represent busy traffic or capture the effects of relayed packets through a slotted-time system, but it is used in [6], in the approximation here, and in other studies of ad-hoc networks due to its simplicity, ease of analysis, and reproducibility of the results it provides.

A randomly selected packet transmitted from node  $S$  to node  $D$  experiences a random delay  $D_{SD}$  that is the sum of the delays on every link traversed in the selected path. Averaging

over all the equally likely  $(S, D)$  pairs in the network, the expected end-to-end delay is given by

$E[D_{ij}]$  is the expected packet delay over link  $(i,j)$  and is a function of the external traffic load, internal traffic load, medium access control (MAC) protocol, and the multiple access interference (MAI). An exact analysis for  $E[D_{ij}]$  in the wireless scenario appears to be very difficult [9, 3].

Nevertheless, the above equation can be rewritten in terms of the relative traffic load.

Since coordination among nodes exists, it is possible to estimate the relative link capacity assigned to each link after creating the link schedule. Through the scheduling algorithm the number of slots assigned to a link is more or less controlled. However, in general, the resulting number of slots assigned to a link depends on several factors including the topology and location of a particular node. For instance, links at the network edge will be subject to less MAI than those at the center of the network. In addition, nodes at the center of the network may carry higher relative traffic. Nevertheless, the capacity assigned to a given link  $(i, j)$  after creating the schedule can be computed. Let  $n_{ij}$  be the number of slots within a period of the schedule,  $NF$ , allocated to link  $(i, j)$ ; then the relative link capacity  $C_{ij}$  is given by (4).

$$C_{ij} = \frac{n_{ij}}{NF} \quad (4)$$

In order to estimate  $E[D_{ij}]$  the following assumptions are needed:

- A. Each node uses a different infinite length buffer for every feasible outgoing link.
- B. Packet arrival times to be transmitted over each link are Poisson distributed with arrival rate  $\lambda_{ij}$  given by (1).

$$E[D] = \sum_{\substack{\forall \text{ links } (i,j) \\ \text{in the network}}} \frac{T_{ij}}{N(N-1)} E[D_{ij}] \quad (3)$$

- C. The  $n_{ij}$  slots assigned to link  $(i,j)$  are uniformly distributed within the schedule.
- D. Packet reception is error free.

Assumption B implies that packet arrivals to each link are independent from the delay and queue process over the previous relaying link. This is similar to Kleinrock's principle of independence [2]. For low traffic this is not always true. For example, one packet from a source to a destination will find basically empty queues over each relaying node, making the Poisson distributed arrival process assumption to each link invalid. Assumption C depends on the scheduling algorithm utilized and could be difficult to achieve. It has been shown in [4] that Assumption C is a desirable property of a good schedule as it minimizes packet delay. Assumption D is reasonable since the schedule ensures sufficiently low interference between links scheduled to transmit during the same slot.

If the above assumptions are used, the expected packet delay through link  $(i,j)$ ,  $E[D_{ij}]$  can be modeled as the resulting packet delay in a TDMA system (M/D/1 queueing model) with a frame length  $N/n_{ij}$  and packet transmission time of 1 slot [ [3], page 13]. Hence, (3) can be approximated by (5).

**III. SIMULATION METHOD**


In order to investigate the performance of the approximation in (5), a simulator based on MATLAB® and ANSIC is used for comparison. In the simulator, external packets arriving at each node are generated according to a Poisson process using the procedure described in [5]. Poisson arrivals and destination node are generated using a linear congruential pseudorandom number generator as implemented in ANSIC. Simulation of equally likely packet destinations is done following the recommendation given in [6]. The statistical properties of these processes have been verified to ensure that the random generator works well for the number of packets generated in the network. According to [7], this improves credibility of the results. First-In-First-Out (FIFO) buffers of length 500 packets are used for each outgoing link where packets were placed after their reception to be forwarded using information from the routing table. The simulation is run until each node transmits 1000 packets to every other node in the network. This is repeated and the measured delays are averaged until the 95% confidence interval lies within 0.1% of the average.

**IV. EXPERIMENTAL SCENARIO**

*Routing:* A minimum-hop algorithm (MHA) is used and ties are broken by selecting the last path found. This corresponds to the minimum-hop path with the largest sum of node ID numbers.

*Scheduling:* The Degree Algorithm introduced by Shor and Robertazzi [9] is adapted for link assignment scheduling and used to generate a conflict-free schedule. This algorithm accounts for traffic load when creating the schedule in order to increase network throughput. All links in the network are first numbered according to traffic load so that heavily loaded links are given higher priority in access to the channel. Sets of non-interfering links, or cliques, are then constructed by attempting to add links in order of priority. Through this process, the following assumptions are used.

- A node can either transmit or receive a single packet in a given slot as shown in fig 1.
- The channel can be spatially reused. Links located two hops apart produce negligible interference. Compatible links, or links that can be enabled without violating these assumptions, are added to each clique. Once all cliques are constructed, a schedule is defined by a fixed-length repeating frame where each clique is assigned a number of slots proportional to its traffic load.

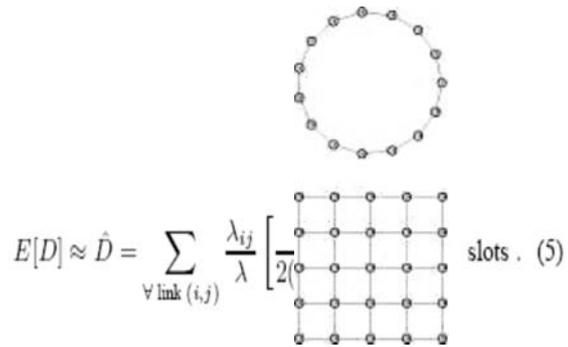

*Fig 1. Examples of tandem, ring, and grid-mesh network topologies.*

All links are assumed to be of the same quality and the network is represented by a connected graph. Once the schedule is generated, slot assignments are scrambled in an effort to distribute link access to the channel uniformly within the frame. The random generator used for scrambling is a lagged Fibonacci generator combined with a shift register random integer generator as implemented in MATLAB®.

*Network topologies:* Ring, tandem, and mesh-grid topologies of various sizes  $N$  nodes are considered. Fig. 4.1 shows examples of these topologies. Ring networks consisting of odd numbers of nodes allow for perfect balancing of the traffic load over links with the MHA. This is not true for the other topologies.

*Performance measures:* The expected delay given by the approximation is denoted  $I$  while the average value provided by the simulation is denoted  $D$ , both of which are

functions of the total external arrival rate  $\bar{\epsilon}$ . The maximum throughput  $A^*$  is the maximum value of  $\bar{\epsilon}$  for which  $D$  remains finite. The *approximation error* is defined as

$$\xi = \frac{\hat{D} - \bar{D}}{\bar{D}} \tag{6}$$

These values are expressed as a percentage, and positive values of  $\hat{\epsilon}$  indicate that the approximation overestimates delay. For performance comparisons, values of  $\hat{\epsilon}$  are found for the low traffic load  $\bar{\epsilon} = 0.10A^*$  and a high traffic load  $\bar{\epsilon} = 0.75A^*$ . These errors are denoted

**V. RESULTS & DISCUSSION**

The end-to-end delay versus offered traffic is shown for tan-dem, ring, and mesh-grid networks in Fig 2, 3, and 4, respectively. The approximation follows the trend in the simulated throughput-delay over all traffic loads. It tends to underestimate delay at low traffic loads for all topologies considered. At high loads, the approximation provides a clear overestimate for tandem networks and a less-pronounced overestimate for ring topologies. For mesh-grid topologies, the simulated delay converges to the approximate value at high traffic loads, providing a close estimate. Though caution should always be taken in applying an approximation, the one examined here is clearly reasonable for the cases considered and thus useful for quick evaluations.

It is interesting to note that the tandem network is the only topology for which the approximation performs better at low traffic loads. This is better revealed by the approximation error at low and high traffic loads as listed for the three topologies in Tables I, II, and III. For tandem networks of the network sizes observed the error for low and high traffic is at most 6.3%. Higher approximation error occurs for a tandem network of only 5 nodes. In larger networks, the approximation tends to get worse as network size increases.

The degradation in performance of the approximation for high traffic load in a tandem network is clearly evident in Fig 2. Simulation results have been verified to ensure that buffer over-flows do not occur and that the simulated delay does asymptote as the external arrival rate approaches maximum throughput. For a tandem network, this asymptote is quite sharp, but the approximation does not reflect such sharpness. In the ring networks, it appears from Fig 3 that the approximation gets worse at network size increases. However, when more network sizes are considered as shown in Table II, it appears there are no distinguishable trends with changes in network size. A relatively high error was found for low traffic but the approximation error for high traffic loads is at

most 11%. This leads to the conclusion that the model is better suited for moderate to high traffic load.

Finally, the highest error for low traffic was found for the mesh-grid topology, making the model poor in this situation. However, the approximation improves with increasing traffic load, and the poor performance at low loads is in stark contrast to its convergence with simulated results at maximum throughput. The model can be utilized with greater confidence to predict the throughput-delay performance at high traffic load for mesh-grid.

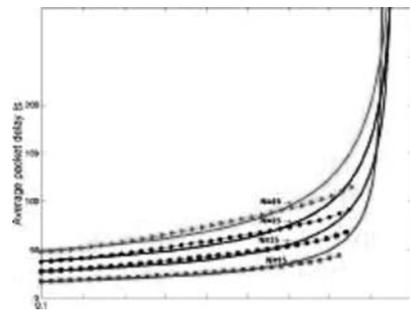


Fig 2. End-to-end delay versus offered traffic for tandem networks of various sizes. The approximate delay is shown in the solid line and simulated delay is shown as points.

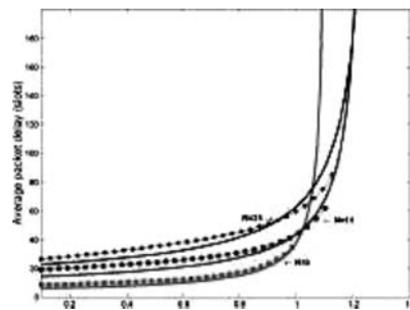


Fig 3. End-to-end delay versus offered traffic for ring networks of various sizes.

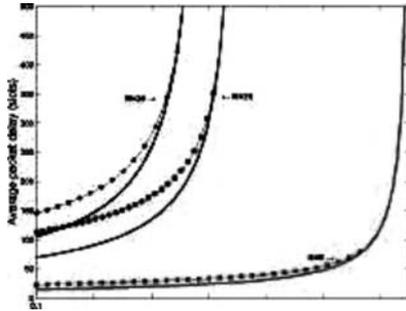


Fig 4. End-to-end delay versus offered traffic for mesh-grid networks of various sizes.

The approximate delay is shown in the solid line and simulated delay is shown as points. Most general and comparable to an arbitrary two-dimensional topology. These results are most extendable to other cases. The performance of the approximation clearly depends on the network topology and size. These two parameters influence traffic and directly affect the packet arrival process to the queue of each link which, together with the uniform slot assignment distribution, is a key assumption of the model. In the case of tandem networks, the arrival process to each link appears to be renewed by packets entering and leaving the network, and the Poisson assumption for the process is reasonable. This agrees with Kleinrock's independence assumption for inter-arrival times as noted in [3]. For ring and mesh-grid topologies at low traffic, the approximation does not perform as well, indicating that the Poisson process assumption may not be true to the same degree. As revealed by Fig 4, this renewal process appears to occur to a greater extent in mesh-grid topologies as traffic load increases. The difference in suitability of the model might be better explained by comparing arrivals at nodes in the tandem and ring network. It is noted that the arrival process and destination for any node in the ring is comparable to that of the middle node in the tandem. At these nodes, inter-arrival times may not follow the exponential distribution as closely since internal arrivals.

$N$	$\xi_{low}(\%)$	$\xi_{high}(\%)$
5	-6.3	3.8
15	-0.04	5.2
25	0.47	4.7
35	1.6	5.1
45	2.5	5.8
55	3.5	6.3

TABLE I  
APPROXIMATION ERROR FOR TANDEM NETWORKS.

$N$	$\xi_{low}(\%)$	$\xi_{high}(\%)$
5	-29	-11
15	-24	-3.6
25	-14	2.0
35	-26	1.6
45	-12	8.8
55	-26	4.5

TABLE II  
APPROXIMATION ERROR FOR RING NETWORKS.

$N$	$\xi_{low}(\%)$	$\xi_{high}(\%)$
9	-37	-17
25	-44	-17

TABLE III  
APPROXIMATION ERROR FOR MESH-GRID NETWORKS.

This symmetry in traffic may result in dependencies on the inter-arrival times. However, when moving away from the middle of the tandem network, internal arrivals occur at intervals that are more unevenly distributed. This is a result of the arrivals coming from opposite ends located at different distances from the node. Thus, the assumption of independent Poisson arrivals is more realistic for nodes further from the middle of the tandem. The assumption still deviates further from reality for the ring and mesh-grid topologies. This possible explanation of results has not been verified in this study, but future work that measures the distribution of simulated arrivals would be useful for testing this explanation.

## VI. CONCLUSION AND FUTURE WORK

The end-to-end delay versus offered traffic follows the trend in the simulated throughput-delay over all traffic loads. It tends to underestimate delay at low traffic loads for all topologies considered. At high loads, the approximation provides a clear overestimate for tandem networks and a less-pronounced overestimate for ring topologies. For mesh-grid topologies, the simulated delay converges to the approximate value at high traffic loads, providing a close estimate. Though caution should always be taken in applying an approximation, the one examined here is clearly reasonable for the cases considered and thus useful for quick evaluations. The highest error for low traffic was found for the mesh-grid topology, making the model poor in this situation. However, the approximation improves with increasing traffic load, and the poor performance at low loads is in stark contrast to its convergence with simulated results at maximum throughput. The model can be utilized with greater confidence to predict

the throughput-delay performance at high traffic load for mesh-grid. Our future work will include analyzing the achievable throughput in an *ad hoc* network with idealized assumptions such as random traffic patterns and uniformly distributed nodes, we show that it is more practical and important to “increase the end-to-end throughput” available to a multihop session connecting a set of sources and destinations in an application

#### VII. REFERENCES

- [1] Z. J. Haas, M. R. Pearlman, and P. Samar, “The zone: routing protocol (ZRP) for ad hoc networks”, IETF Internet Draft. <http://www.ietf.org/internet-drafts/draft-ietf-manet-zone-zrp-02>, July 2002.
- [2] R. Sivakumar, P. Sinha, and V. Bharghavan, “CEDAR: A core-extraction distributed ad hoc routing algorithm,” *IEEE Journal on Selected Areas in Communications* vol. 17, pp. 1454-1465, August 1999.
- [3] S. Corson and J. Macker. “Mobile ad hoc networking (MANET): Routing protocol performance issues and evaluation considerations”, RFC2002, January 1999.
- [4] P. Johansson, T. Larsson, N. Hedman, B. Mielczarek, and M. Degermark. Scenario-based Performance Analysis of Routing Protocols for Mobile Ad-hoc Networks. In *Proceedings of ACM MOBICOM*, Seattle, WA, August 1999.
- [5] Jochen Schiller. *Mobile Communications*. Addison-Wesley, 2000.
- [6] Danny D. Patel. Energy in ad-hoc networking for the pico radio. Technical report.
- [7] C.Siva Ram Murthy and B.S.Manoj. *Ad Hoc Wireless Networks Architectures and Protocols*. PRENTICE HALL, 2004.
- [8] Laura Marie Feeney. A taxonomy for routing protocols in mobile ad hoc networks. Technical report, Swedish Institute of Computer Science, Sweden, 1999.
- [9] David B. Johnson and David A. Maltz. Dynamic source routing in ad hoc wireless networks. Technical report, Carnegie Mellon University, 199