

July 2013

## TARGET HIT INTERCEPTOR MID-COURSE GUIDANCE SCHEME FOR BALLISTIC MISSILE INTERCEPTION

N. PRABHAKAR

*Defence Research & Development Laboratory, Hyderabad- 500 058, n.prabhakar@gmail.com*

K. CHANDRA SEKHAR

*Defence Research & Development Laboratory, Hyderabad- 500 058, sekhar\_kc@gmail.com*

V. VAIDIYANATHAN

*SASTRA University, Thanjavur-613 401, v.vaidiyanathan@yahoo.co.in*

Follow this and additional works at: <https://www.interscience.in/ijarme>



Part of the [Aerospace Engineering Commons](#), and the [Mechanical Engineering Commons](#)

---

### Recommended Citation

PRABHAKAR, N.; CHANDRA SEKHAR, K.; and VAIDIYANATHAN, V. (2013) "TARGET HIT INTERCEPTOR MID-COURSE GUIDANCE SCHEME FOR BALLISTIC MISSILE INTERCEPTION," *International Journal of Applied Research in Mechanical Engineering*: Vol. 3 : Iss. 1 , Article 2.

Available at: <https://www.interscience.in/ijarme/vol3/iss1/2>

This Article is brought to you for free and open access by Interscience Research Network. It has been accepted for inclusion in International Journal of Applied Research in Mechanical Engineering by an authorized editor of Interscience Research Network. For more information, please contact [sritampatnaik@gmail.com](mailto:sritampatnaik@gmail.com).

# TARGET HIT INTERCEPTOR MID-COURSE GUIDANCE SCHEME FOR BALLISTIC MISSILE INTERCEPTION

N.PRABHAKAR<sup>1</sup>, K. CHANDRA SEK HAR<sup>2</sup>, V. VAIDIYANATHAN<sup>3</sup>

<sup>1,2</sup>Defence Research & Development Laboratory, Hyderabad- 500 058

<sup>3</sup>SASTRA University, Thanjavur-613 401

**Abstract-** A Mid-course guidance algorithm has been developed for an exo-atmospheric interceptor to neutralize an incoming high speed ballistic Target. The guidance scheme positions the interceptor ahead of the target so that the velocity vectors of the target and interceptors are in the same direction. As the interceptors used in ballistic missile defence have a lower velocity than the incoming target, the target approaches the interceptor. The guidance scheme reduces the closing velocity compared to a head on approach thereby increasing the homing time for a given terminal sensor detection range. The guidance law is validated through numerical simulation.

**Keywords-** Ballistic Missile Defence, THI Guidance, Mid-Course Trajectory Shaping, Exo-atmospheric Intercept.

## Nomenclature

$S_r$  Seeker detection range  
 $V_c$  Closing Velocity  
 $V_m$  Missile Velocity  
 $\gamma_p$  Flight path angle in elevation plane  
 $\gamma_y$  Flight path angle in azimuth plane  
 $\mu$  Geocentric latitude  
 $\lambda$  Geocentric longitude  
 $m$  Vehicle mass  
 $T$  Missile Thrust  
 $C_{D0}, C_{N\alpha}$  aerodynamic coefficients  
 $\rho$  density  
 $S$  Effective surface area  
 $\alpha, \beta$  angle of attack in elevation and azimuth planes  
 $\omega$  Earth angular speed  
 $\Delta DR$  Intercept point down range error  
 $\Delta CR$  Intercept point cross range error

## 1. INTRODUCTION


The interception of high-speed ballistic missiles has been engaging the attention of the guidance designers for the last two decades. The trajectory dynamics of ballistic missiles have been covered in many texts<sup>1, 2</sup>. The basic of ballistic missile intercept has been explained by Zarchan<sup>3</sup>. The paper by Lukacs and Yakimenko<sup>4</sup> covers the existing guidance laws and develops a mid course trajectory shaping law. A sub-optimal mid course guidance was developed by Song and Takht<sup>5</sup>.

The engagement process of the interceptor normally consists of the following phases namely (a) Ground Guidance Computation (b) Launch process (c) Mid-Course Guidance (d) Coast phase and (e) Terminal Homing Phase. The ground guidance computation determines the appropriate launch time of the interceptor, its initial flight azimuth along with the initial guidance parameters of the interceptor. The launch process consists of the actual launch of the

missile, a vertical rise period culminating in a pitch down in the desired azimuth. The mid course phase is the trajectory shaping phase based on ground uplinked target state vector, lasting till burnout. During the coast phase the kill vehicle covers ground range and gains altitude. The terminal phase is when the interceptor acquires the target using its own onboard sensor and performs maneuvers to nullify the handing over errors.

A new approach for the terminal phase guidance called 'Head Pursuit Guidance' was introduced by Shima<sup>6</sup>. In this scheme, the interceptor velocity matched with that of the target by a preliminary maneuver. The interceptor trajectory is so shaped such that it is ahead of the target and flying in the same direction. As the speed of the interceptor is significantly lower than that of the target, the target catches up with the interceptor. After acquisition of the target using onboard sensors, the interceptor carries out the required terminal maneuvers to hit the target. As the target is overtaking the interceptor, the phase 'Target Hit Interceptor' (THI) seems more appropriate than 'Head Pursuit', which is therefore used in this study. The preliminary interceptor maneuver as the mid course phase guidance is the area of study of this paper.

A major advantage of THI guidance scheme is that the homing time for a given scenario for an onboard terminal sensor is significantly increased. The classical intercept geometry is shown in Fig1.




Let  $V_t$  and  $V_m$  be the velocities of the target and interceptor respectively, then the closing velocity  $V_c$  is approximately

$$V_c \approx V_t - V_m \quad [1]$$

If  $S_r$  is the sensor detection range, the homing time  $t_h$  is given by

$$t_h = \frac{S_r}{V_c} \quad [2]$$

The geometry for THI guidance is shown below in Fig2.

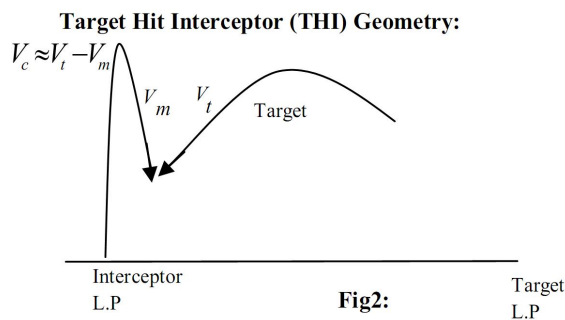

The closing velocity is now  $V_c \approx V_t - V_m$  [3]

$$t_h = \frac{S_r}{V_c} \quad [4]$$

As closing velocity for the second case is markedly lower than the first, one obtains a larger homing time. Larger homing time naturally reduces the divert capability requirement thus leading to a much lighter kill vehicle. The above stated advantage notwithstanding a major penalty is the increased flight time of the interceptor. This in turn implies a larger weapon system reaction time along with increased ground sensor range.

The remainder of the paper is organized as follows. The next section covers the coordinate frames and the interceptor mathematical model is explained in section 3. The guidance law and the solution methodology are covered in section 4 and 5. The numerical simulation results are presented and followed by the conclusion section.

## 2. REFERENCE CO-ORDINATE FRAMES

The co-ordinate frames used in the study are Earth Centered Earth Fixed (ECEF), Local East-North-Vertical (ENV) and the Down range-Cross range-Height (DCH) frame. The ECEF frame has its origin at the center of the earth and rotates with the earth.

The X-axis lies in the equatorial plane going through the intersection of Greenwich meridian and the equator, the Z-axis goes through the North pole and the Y-axis completes the right-handed triad. The Local ENV frame has its center at the interceptor's center of gravity with its X-axis pointing towards local east, Y-axis pointing towards local north (Fig 3) and the Z-axis pointing in the local vertical direction. The DCH frame has its center at the interceptor's Launch point with its X-axis pointing towards intercept point, the Z-axis pointing in the local vertical direction and the Y-axis completes the right-handed triad.

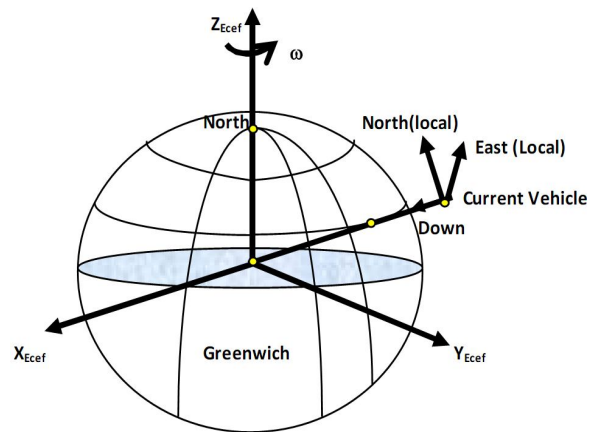


Fig: 3 Reference Frames- ECEF and Local ENV

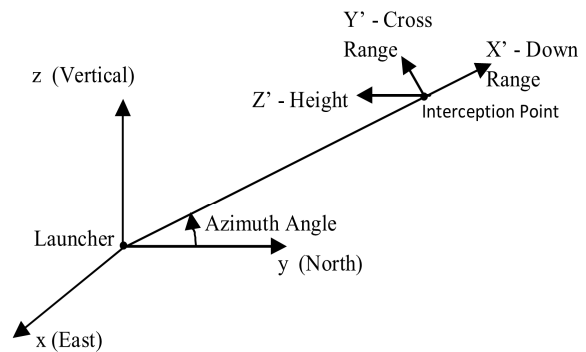


Fig4: Reference Frames- DCH

## 3. VEHICLE MATHEMATICAL MODEL

The target and the interceptor are modeled as point mass, traveling over a spherical rotating earth. As the target is considered in the exo-atmospheric phase, the propulsive and aerodynamic terms are zero. The equations of motion are given below equations from 5 to 12

$$\dot{V} = \frac{\left(T \cos \alpha - \frac{1}{2} \rho V^2 S C D_0\right)}{m} - g \sin \gamma_p \quad [5]$$

$$\dot{\gamma}_p = \gamma_{pdemand} \quad \text{if } t \leq t_{guid} \quad [6]$$

$$\dot{\gamma}_p = \frac{-g \cos \gamma_p}{V} + \frac{V}{r} \cos \gamma_p + 2\omega \cos \gamma_y \cos \lambda + \omega^2 r \cos \lambda (\cos \gamma_p \cos \lambda + \sin \gamma_p \sin \gamma_y \sin \lambda)$$

if  $t > t_{guid}$  [7]

$$\dot{\gamma}_y = \gamma_{ydemand} \quad \text{if } t \leq t_{guid} \quad [8]$$

$$\dot{\gamma}_y = -\frac{V \tan \lambda \cos \gamma_p \cos \gamma_y}{r} + 2\omega (\tan \gamma \sin \gamma_y \cos \lambda - \sin \lambda) - \frac{\omega^2 r}{\cos \gamma_p} \cos \gamma_y \sin \lambda \cos \lambda$$

if  $t > t_{guid}$  [9]

$$\dot{r} = V \sin \gamma_p \quad [10]$$

$$\dot{\mu} = \frac{V \cos \gamma_p \cos \gamma_y}{r \cos \lambda} \quad [11]$$

$$\dot{\lambda} = \frac{V \cos \gamma_p \sin \gamma_y}{r} \quad [12]$$

#### 4. GUIDANCE LAW

The mid course trajectory shaping guidance law is developed using an optimal control formulation and then converted to non-linear programming problem by discretizing the control vector. The problem can be stated as

$$\min j = m_d(t_f) + k * (\gamma_{tf} - \gamma_{mf})$$

Where  $m_d$  is the miss distance  $\gamma_{tf}$ ,  $\gamma_{mf}$  are the flight path angles of the target and miss distance  $t_f$  is the time of flight which is free  $k$  is the penalty weighting factor

The system differential equations are given by

$$\dot{x}^T = f(x^T, t) \quad [13]$$

$$\dot{x}^m = f(x^m, u, t) \quad [14]$$

Where  $x^T$  and  $x^m$  are the state vectors of the target and missile and the governing equations are given by equations 5 to 12.


The  $t_f$  is the flight time during ballistic phase.

In trajectory optimization problems, usually the angle of attack  $\alpha$ ,  $\beta$  are the control variables while in guidance problems, the lateral accelerations  $\eta_p$ ,  $\eta_y$  are the control variables. In this study, the control variable is chosen as the flight path rates  $\dot{\gamma}_p$  and  $\dot{\gamma}_y$ .

Under trim conditions all the three are equivalent and

the choice of  $\dot{\gamma}_p$  and  $\dot{\gamma}_y$  give direct control over the trajectory profile. The continuous optimal time problem is converted to a NLP format by assuming a set of control values at 'n' node points (Linearly interpolating between them). The present study uses a single  $\dot{\gamma}$  value for simplicity. The simulation results confirm the adequacy of this assumption.

Essentially the guidance algorithm proceeds as follows as explained in the flow chart.

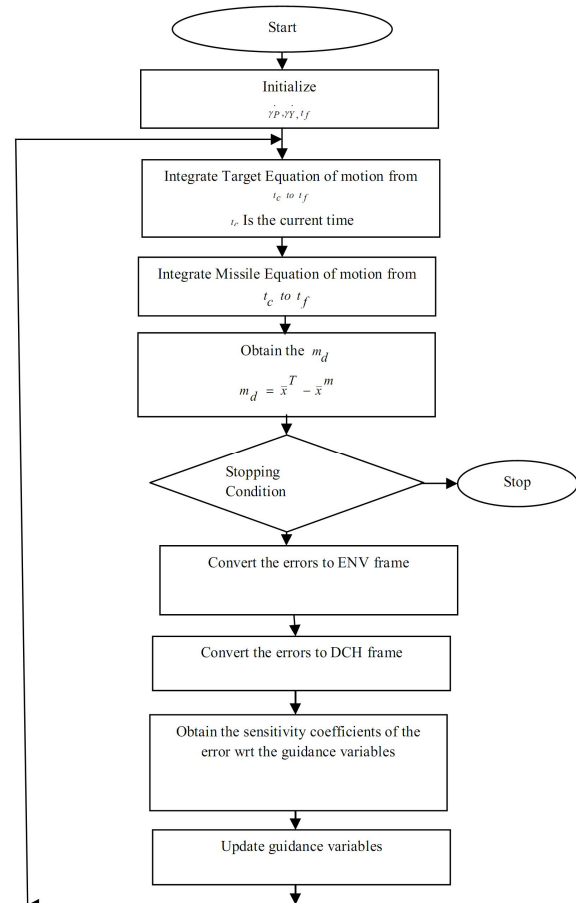

The guidance vector that is chosen here is  $u = [\dot{\gamma}_p, \dot{\gamma}_y]^T$ , where  $\dot{\gamma}_p, \dot{\gamma}_y$  are the flight path angle rates of the missile in elevation and azimuth plane respectively. The flight path rates are the basic trajectory parameters which can be altered for lateral correction by the guidance system to achieve the desired interception point.

The guidance obtains initialization of the variables  $\dot{\gamma}_p, \dot{\gamma}_y$  from the Ground guidance computation algorithm computed before the launch of interceptor. The following procedure is carried out at every guidance cycle to minimize the predicted miss distance. The initial values for  $\dot{\gamma}_p, \dot{\gamma}_y, t_f$  are obtained from Ground guidance computation algorithm computed before the launch of interceptor. The

guidance algorithm updates the above said parameters at every guidance cycle to minimizing the predicted miss distance.

The equations of motion of target and interceptor are integrated till  $t_f$  to calculate the final state vectors in ECEF frame. These are then transforms to DCH frame via an intermediate local ENV frame. The errors in DCH frame are related to the control variables  $\gamma_p$  &  $\gamma_y$

The down range error ( $\Delta DR$ ) and the cross range error ( $\Delta CR$ ) are the functions of the flight path angles  $\gamma_p$  &  $\gamma_y$  respectively and the time of correction is a function of range error in the velocity direction. Therefore,

$$\Delta\gamma_p = \left( \frac{\partial\gamma_p}{\partial DR} \right) * \Delta DR \quad [15]$$

$$\Delta\gamma_y = \left( \frac{\partial\gamma_y}{\partial CR} \right) * \Delta CR \quad [16]$$

$$\Delta t_c = - \left( \frac{\Delta x \Delta V_x + \Delta y \Delta V_y + \Delta z \Delta V_z}{\Delta V_x^2 + \Delta V_y^2 + \Delta V_z^2} \right) \quad [17]$$

Where  $\frac{\partial\gamma_p}{\partial DR}$  &  $\frac{\partial\gamma_y}{\partial CR}$  are the sensitivity of down range & cross range w.r.to flight path angles.  $\Delta\gamma_p$  &  $\Delta\gamma_y$  are the angular changes required in the flight path angles to minimize the down range and cross range errors respectively. The required angular change is distributed from current time to closed loop guidance time ( $t_{guid}$ ). Therefore the demanded flight path rate is

$$\dot{\gamma}_p = \dot{\gamma}_p + \frac{\Delta\gamma_p}{t_{guid} - t} \quad [18]$$

$$\dot{\gamma}_y = \dot{\gamma}_y + \frac{\Delta\gamma_y}{t_{guid} - t} \quad [19]$$

## 6. NUMERICAL SIMULATION RESULTS

The guidance algorithm was evaluated numerically using missile data published in ref4 and reproduced in the table 1.0. The following table 2.0 summarizes the miss-distance achieved for different initial conditions of the target. The error convergence is shown in Fig6&7 and variation of the guidance parameters are shown in Fig 8 & 9.

Table 1 Missile Data

$m_0 = 907.2 \text{ kg}, g_0 = 9.81 \frac{\text{m}}{\text{s}^2}, I_{sp} = 270 \text{ sec}$
$T = m g_0 I_{sp}, \dot{m} = \begin{cases} 27.06 \frac{\text{kg}}{\text{sec}}, 0 \leq t \leq 10 \text{ sec} \\ 9.02 \frac{\text{kg}}{\text{sec}}, 10 \leq t \leq 57 \text{ sec} \end{cases}$

Aerodynamic Derivatives					
<b>M</b>	<b>0.00</b>	<b>0.60</b>	<b>1.00</b>	<b>1.07</b>	<b>1.14</b>
<b>C<sub>Lα</sub></b>	<b>10.04</b>	<b>10.80</b>	<b>13.21</b>	<b>14.16</b>	<b>13.04</b>
<b>M</b>	<b>1.20</b>	<b>1.50</b>	<b>2.00</b>	<b>2.50</b>	<b>≥ 3.00</b>
<b>C<sub>Lα</sub></b>	<b>12.60</b>	<b>11.50</b>	<b>10.49</b>	<b>9.58</b>	<b>8.62</b>
<b>M</b>	<b>0.00</b>	<b>0.80</b>	<b>0.90</b>	<b>1.00</b>	<b>1.05</b>
<b>C<sub>D0</sub></b>	<b>0.26</b>	<b>0.27</b>	<b>0.28</b>	<b>0.31</b>	<b>0.38</b>
<b>M</b>	<b>1.25</b>	<b>1.50</b>	<b>2.00</b>	<b>2.50</b>	<b>≥ 3.00</b>
<b>C<sub>D0</sub></b>	<b>0.36</b>	<b>0.34</b>	<b>0.29</b>	<b>0.26</b>	<b>0.21</b>

Table 2. Miss Distance data.	
Ballistic Target Interception	Miss-Distance(m)
Case1: High Altitude	9.15
Case2: Medium Altitude	2.53
Case3: Low Altitude	7.13

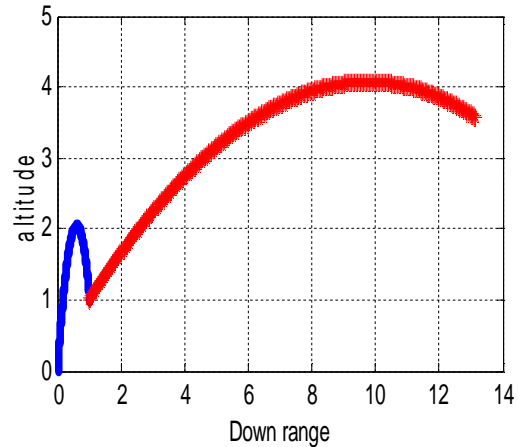


Fig5: Interception Geometry Pitch Elevation plane

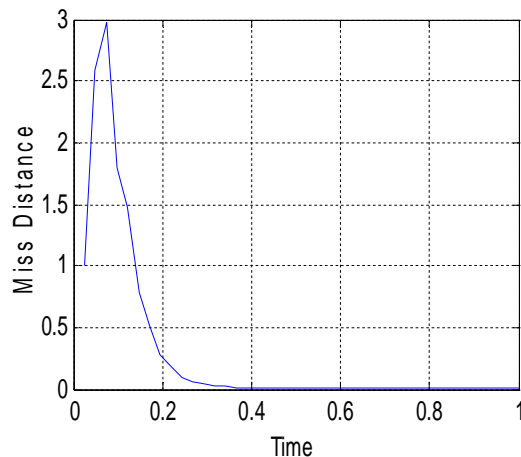


Fig6: Position Error Convergence

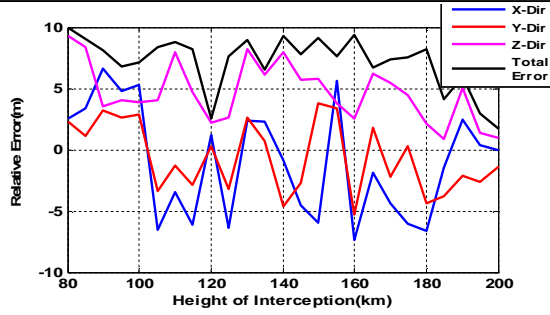


Fig7: Impact Error Vs Height of Interception

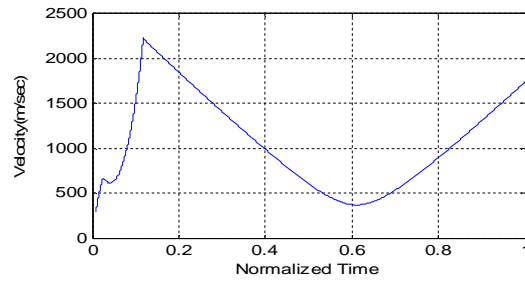


Fig10: Velocity Profile

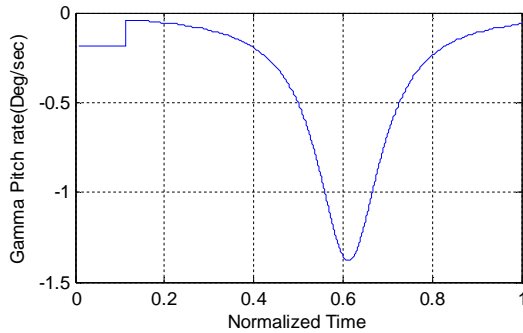


Fig8: Flight Path Rate in convergence

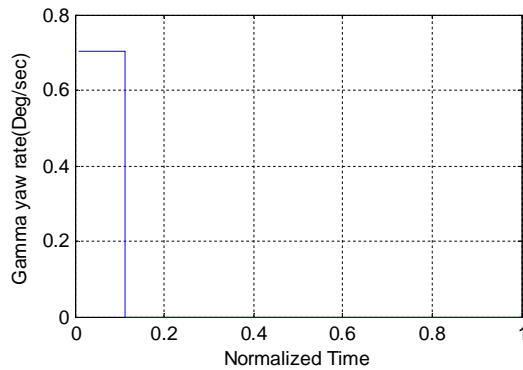


Fig9: Flight Path Rate in yaw

## 7. CONCLUSION

A ‘Target Hit Interceptor’, THI guidance midcourse law has been developed for intercepting exo-atmospheric ballistic missiles. The law performs well and brings the miss distance to small values. It is proposed to evaluate the guidance algorithm using a higher fidelity 6-dof simulation test bed.

## REFERENCES

- [1] Nguyen X. Vinh, Optimal Trajectories in Atmospheric flight, ESPC, Amsterdam-Oxford-New York , Inc. 1981
- [2] Siouris, G., Missile Guidance and Control Systems, Springer, New York, NY, 2004.
- [3] Zarchan, P., Tactical and Strategic Missile Guidance, 4th ed., AIAA Progress in Astronautics and Aeronautics, Vol.199,Reston, VA, 2002.
- [4] Eun-Jung Song and Min-Jea Tahk, Suboptimal Midcourse Guidance for interception of free-fall targets, AIAA-99-4067,1999
- [5] John A. Lukacs, Oleg A. Yakimenko, Trajectory-Shape-Varying Missile Guidance for Interception of Ballistic Missiles during the Boost Phase, AIAA Guidance, Navigation and Control Conference and Exhibit 20 - 23 August 2007, Hilton Head, South Carolina.
- [6] Tal Shima, Oded M. Golan, Head Pursuit Guidance, Journal of Guidance, Control and Dynamics Vol. 30, No. 5, Sep-Oct 2007.

