

January 2014

## FEA BASED ANALYSIS OF SHACKLE FOR OFFSHORE APPLICATION

RAHUL R. GAJI

*Rajarambapu Institute of Technology, Sakharale, Islampur, gajirahul2008@rediffmail.com*

M.T. TELSANG

*Rajarambapu Institute of Technology, Sakharale, Islampur, martand.telsang@ritindia.edu*

Follow this and additional works at: <https://www.interscience.in/ijmie>



Part of the [Manufacturing Commons](#), [Operations Research](#), [Systems Engineering and Industrial Engineering Commons](#), and the [Risk Analysis Commons](#)

---

### Recommended Citation

GAJI, RAHUL R. and TELSANG, M.T. (2014) "FEA BASED ANALYSIS OF SHACKLE FOR OFFSHORE APPLICATION," *International Journal of Mechanical and Industrial Engineering*: Vol. 3 : Iss. 3 , Article 2. Available at: <https://www.interscience.in/ijmie/vol3/iss3/2>

This Article is brought to you for free and open access by Interscience Research Network. It has been accepted for inclusion in International Journal of Mechanical and Industrial Engineering by an authorized editor of Interscience Research Network. For more information, please contact [sritampatnaik@gmail.com](mailto:sritampatnaik@gmail.com).

# FEA BASED ANALYSIS OF SHACKLE FOR OFFSHORE APPLICATION

RAHUL R. GAJI<sup>1</sup> & M.T. TELSANG<sup>2</sup>

<sup>1,2</sup>Department of mechanical engineering, Rajarambapu Institute of Technology, Sakharale, Islampur  
Email : gajirahul2008@rediffmail.com, martand.telsang@ritindia.edu

**Abstract**— Nowadays Oil exploration in offshore area is responsible for increasingly greater percentage of production in the world. So mooring Systems play key role. Failure of a single component in a mooring line can produce incalculable damages. Due to environmental loading the mooring changes its position. Each component in the mooring are subjected to angular tensions from top and bottom. It produces strong non linearity in the components. Shackle is the critical part of this mooring system. Analysis of shackle is carried out by consideration of variation in angle from 1° to 5° in Plane and Out of Plane with ANSYS 12. An attempt has been made to analyze the effect of force angle on proof load. As the variation in angle increases from 1° to 5°, proof load decreases. Validation of results are carried out by using horizontal UTM.

**Keywords**-Proof Load, Break Load, Yield Strength, Ultimate Tensile Strength.

## I. INTRODUCTION

A mooring, in general terms is defined as a compliant structure that restrains a vessel against the action of wind, wave, and current forces. Mooring consist of number of components as like Floatation device, Wire, Chain, Shackle, Anchor etc

The purpose of a mooring is to safely hold a ship in a certain position to accomplish a specific mission. A key need is to safely hold the vessel to protect the ship, life, the public interest, and to preserve the capabilities of the vessel and surrounding facilities. Ship moorings are provided for Loading and unloading, Ship storage, Maintainance etc.[8]

General mooring system including only chain and anchor is shown in fig 1.1.

Due to environmental effects like waves, wind,current the ship and hence the entire mooring system undergo change into position.following are the degree of freedom of ship:

- Surge- In the X direction.
- Sway- In the Y direction.
- Heave- In the Z direction.

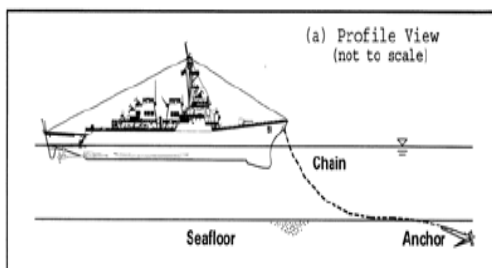


Fig 1.1 : General mooring system

- Roll- Angular about X axis.
- Pitch- Angular about Y axis.

- Yaw- Angular about Z axis.

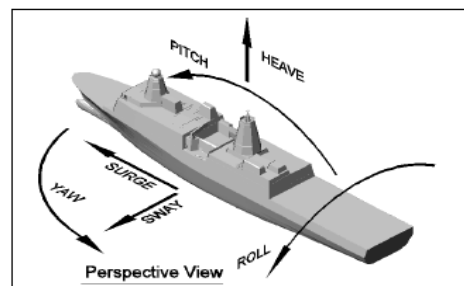


Fig 1.2 the degree of freedom of ship.

Due to the environmental conditions mooring is changing its position from one state to other state. Therefore each component of mooring is subjected to tension from above and below.. Shackle as shown in fig 1.3 is critical component of mooring system subjected to tensions. Number of shackle are connected in mooring but in this Paper the shackle which is connected to anchor is analyzed.

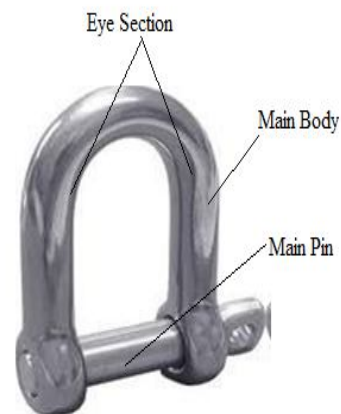


Fig. 1.3 Shackle

**2. DESIGN AND ANALYSIS OF SHACKLE**

Design of Shackle is carried out in CATIA V5 R18. For the analysis the model of Shackle is imported in ANSYS 12 Workbench.

*A ) Material Properties*


Material Properties of Shackle are as follows:

- Material : Structural Steel DNV 203
- Mass : 471Kg
- Density : 7850 Kg/m<sup>3</sup>
- Volume : 5.99e-2m<sup>3</sup>
- Youngs Modulus : 2e11 Pa
- Poissons ratio : 0.3
- Yield strength : 2.5e8 Pa

*B) Meshing of Shackle*

For Meshing of model SOLID 185 element is used. The characteristics of meshing is as follows

Element type	Solid 185
Method of Mesh control	Hex Dominant
Size	13 mm
Statistics	
No. of Nodes	214875
No. of Elements	64228

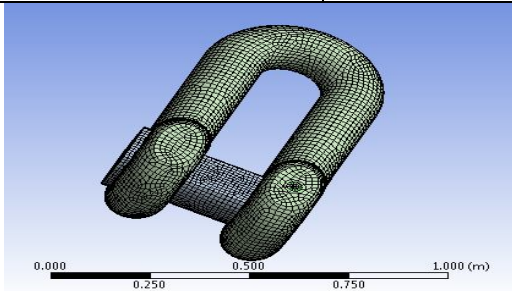


**Fig. 2.1 Meshing of Shackle Assembly**

*C) Boundary Condition*

Shackle is subjected to loading only on the inner face of the eye section of the main body as well as it is required to fix the inner face of Main pin because only this face comes in contact with Anchor. So that These faces can be selecting with the help of Imprint the faces option.


Proof Load : 5000 KN  
Fixed Support: Inner face of Main Pin

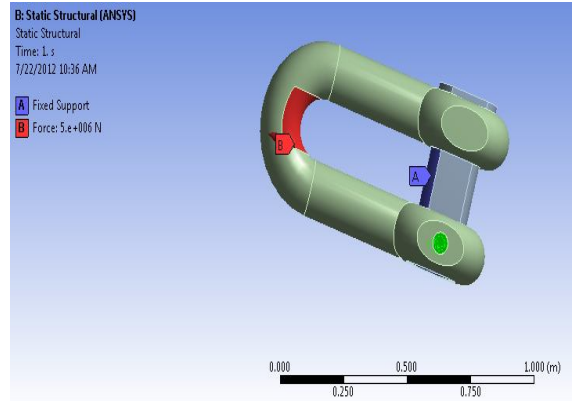

**3. RESULTS AND DISCUSSION**

*3.1 Analysis of shackle under consideration of axial load*

*3.1.1 Axial test of shackle under consideration of proof load*

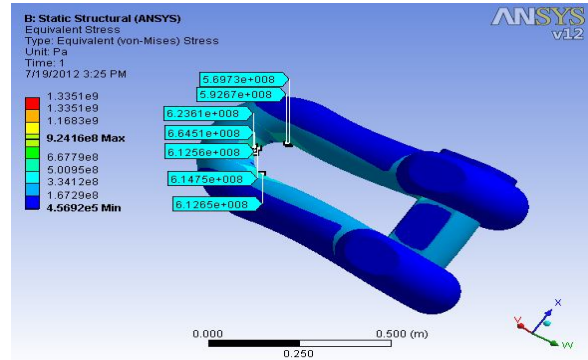

**Fig. 3.1 Proof load 5000 KN**

Due to contact of parts unavoidable stress concentration is formed hence probe values of stress as Max. Equivalent Stress (Von Mises Stress) are taken.

Max. Eq. Stress from result : 664.51MPa

**Table 3.1: Stress for Proof load**

Proof Load KN	Von mises Stress (MPa)(Probe)	Max. Deformation (mm)
5000	664.51	1.0087

Yield strength of shackle is just above the value of von mises stress. Hence Yield strength of shackle is 680MPa.

*3.1.2 Axial test of shackle under consideration of break load and hence find out ultimate strength*

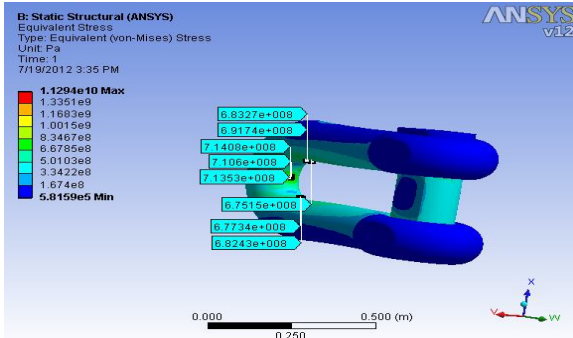


Fig 3.2 : Break load 9000 KN

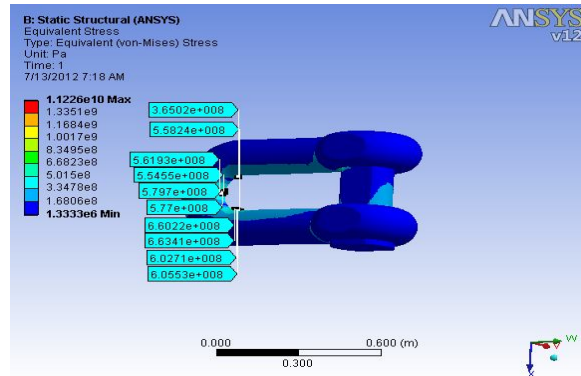


Fig 3.5 : Angle 3° and Proof load 4200 KN

**Table 3.2 : Stress for Break Load**

Break Load KN	Von Mises Stress (MPa)(Probe)	Max. Deformation (mm)
9000	714.08	4.4418

Hence value of ultimate strength just above the stress value.

Ultimate Strength : 730Mpa

3.2 Analysis of shackle when variation in plane

Material non linearity is solved in ANSYS 12 by giving Yield strength and Ultimate strength of Shackle.

- Yield Strength : 680 MPa
- Ultimate strength : 730 MPa
- Variation of angle : 1° to 5°

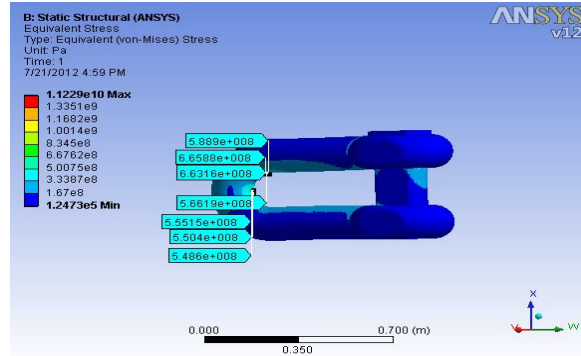


Fig 3.6: Angle 4° and Proof load 3990KN

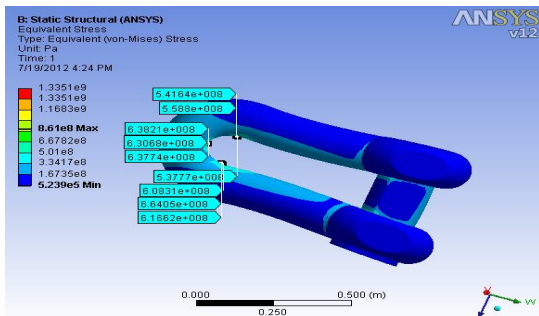


Fig 3.3 : Angle 1° and proof load 4800KN

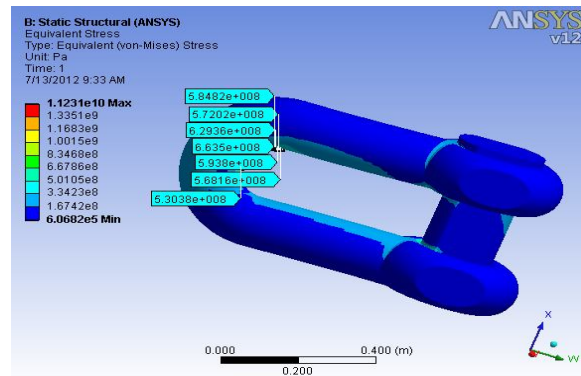


Fig 3.7 : Angle 5° and Proof load 3750KN

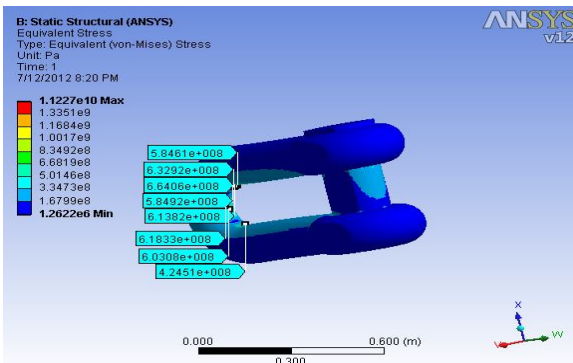


Fig 3.4 : Angle 2° and Proof load 4500KN

**Table 5.3 : Effect of Angle on Proof Load**

Angle	Proof load (KN)	Von Mises Stress (MPa)	Max. Deformation (mm)
1°	4800	664.05	1.1195
2°	4500	664.06	1.1578
3°	4200	663.41	1.1622
4°	3990	665.88	1.2636
5°	3750	662.39	1.3661

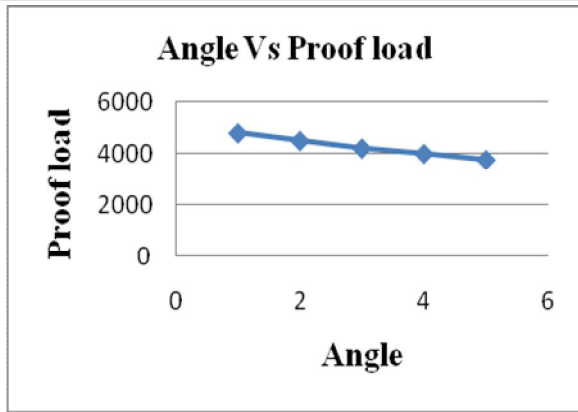


Fig 5.8: Graph of Angle Vs Proof load

As the angle goes on increasing from 1° to 5° In plane the proof load goes on decreasing from 4800 KN to 3750 KN as shown in fig. 5.8.

**4. TESTING OF SHACKLE AND VALIDATION OF RESULT**



Fig. 4.1 Horizontal UTM

Testing of shackle is carried out by using horizontal UTM shown in Fig 4.1. Eight specimens of Shackle as shown in fig 4.2 are tested.



Fig.4.2 Specimens of Shackle

**Reading:**

Specimen NO	Proof Load KN	Break Load KN	Max. Displacement(mm)
1	5000	8955	1.10
2	5000	8970	1.15
3	5000	8960	1.11
4	5000	8955	1.12
5	5000	8965	1.10
6	5000	8960	1.14

7	5000	8975	1.15
8	5000	8965	1.12

Proof load after testing is 5000 KN.

Break load of shackle when first visible crack observed is 9000 KN. From reading experimental value of displacement and FEA value of deformation are nearly same.

**CONCLUSION**

From the results obtained it is concluded that as the variation in angle on shackle increases from 0° to 5° the proof load decreases from 5000KN to 3750KN. Hence Optimization of shackle is required to provide safety mooring system. Because if shackle fails and hence mooring system, the replacement cost of shackle is five times greater than overall cost including transportation.

**FUTURE SCOPE**

Present dissertation work covers the Shape optimization , but still it has a scope for material optimization. All mooring components are required corrosion protection. Corrosion control is needed for structural steel of offshore structures by considering :

- coatings and/or cathodic protection
- use of a corrosion allowance
- inspection/monitoring of corrosion
- control of humidity for internal zones (compartments)

**REFERENCES**

- [1]. Richard K. Dewey – “Mooring Design & Dynamics” A Matlab® Package for Designing and Analyzing Oceanographic Moorings and Towed Bodies. - *Marine Models Online*, Vol (1), pp 103-157, Centre for Earth and Ocean Research, University of Victoria, BC, Canada.
- [2]. Li-zhong Wangn, ZhenGuo,FengYuan – Quasi-static three dimensional analysis of suction anchor mooring system.- *Ocean Engineering* 37 (2010) 1127–1138.
- [3]. Offshore Standard- DNV-OS-E301 Position Mooring, October 2008. Veritasveien 1, NO-1322 Hovik, Norway.
- [4]. Li-Zhong Wang, Zhen Guo, Feng Yuan - Three-dimensional interaction between anchor chain and seabed - *Applied Ocean Research* 32 (2010) 404-413, College of Civil Engineering and Architecture, Zhejiang University, Hangzhou, China
- [5]. Paul McCann, David T Smith - Axial fatigue tests on wire rope slings used for offshore containers -Health and Safety Laboratory, Harpur Hill, Buxton
- [6]. I.M.L. Ridge, R.E Hobbs, J. Fernandez – Predicting the torsional response of large mooring chains- Offshore technology conference
- [7]. L.A. Dobrzanski, A. Pusz, A.J. Nowak, M. Gorniak - Application of FEM for solving various issues in material engineering - *Journal of Achievements in materials and manufacturing engineering*. Vol. 42 P.P.44-100